

## File ceiling

code F1201.8HCX/01




### PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 19.2 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

### PRODUCT SPECS

|                           |                         |
|---------------------------|-------------------------|
| Installation method       | Ceiling surface mounted |
| Light source              | LED                     |
| Absorbed power            | 19,2 W                  |
| Color temperature         | Horticulture            |
| Color rendering index CRI | >90                     |
| Optic                     | Microprismatic diffuser |
| Finishing                 | White                   |
| MacAdam color tolerance   | 3                       |
| Life time estimate        | 50000h Ta 25° L80B10    |
| Protocol                  | On/Off                  |
| Energy efficiency class   | E                       |
| Weight                    | 1.30 Kg                 |
| Dimension                 | L860 mm                 |
| IP Grade                  | IP40                    |
| Power supply              | 220-240V 50-60Hz        |

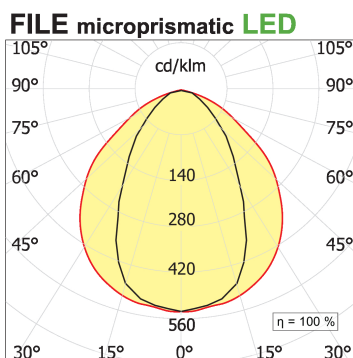

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

