

## Minifile Trimless Recessed LED with diffuser

code ML100.830D/01




### PRODUCT DESCRIPTION


Total recessed lamp LED with opaline diffuser

### PRODUCT SPECS

|                              |                                         |
|------------------------------|-----------------------------------------|
| Installation method          | Trimless recessed                       |
| Light source                 | LED                                     |
| Absorbed power               | 12,8 W                                  |
| Color temperature            | 3000K                                   |
| Color rendering index CRI    | >90                                     |
| Finishing                    | White                                   |
| Luminous flux of the product | 721 lm                                  |
| Luminous efficiency          | 56 lm/W                                 |
| MacAdam color tolerance      | 3                                       |
| Life time estimate           | 50000h Ta 25° L80 B10                   |
| Protocol                     | Dimmable Dali                           |
| Energy efficiency class      | E                                       |
| Dimension                    | L580 mm                                 |
| Hole size                    | 34xL+2 mm                               |
| IP Grade                     | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply                 | 220-240V 50-60Hz                        |

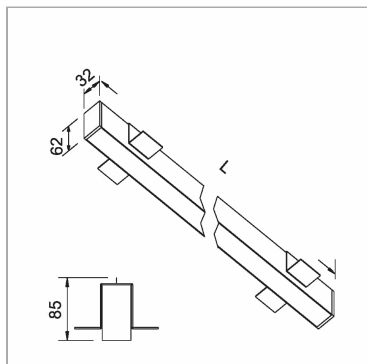

### MINIFILE opal LED

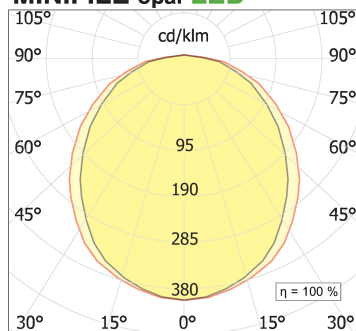

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 2

## OPTIONAL ACCESSORIES

### Container Minifile Empty profile

code LTMF.1000/01



Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



code LTMF.2000/01



Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



code LTMF.3000/01



Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



code LTMF.misura/01



Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet



### Accessori Wallbox Couple of closure heads for wallbox MINIFILE

code LTM200.1



Ccouple of closure heads for wallbox minifile

Technical Sheet

