



## Microfile wall/ceiling

code MF013.840/01



### MICROFILE LED

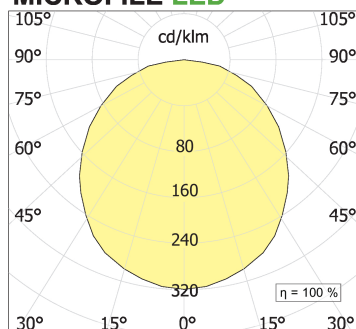

### PRODUCT DESCRIPTION

Direct light ceiling lamp made of extruded aluminum 6060, square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules 33 W assembled and wired, protocol vedi alimentatore. Epoxy powder coated, white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Linea Led
Absorbed power	33 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1825 lm
Luminous efficiency	55 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	0.90 Kg
Dimension	L1515 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

