

Microfile suspension

code MF031.830/01




PRODUCT DESCRIPTION


Direct light suspension lamp, indoor, made of extruded aluminium 6060 square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules [power] assembled and wired; protocol [protocol]. Epoxy powder coated with [finish] color finish; complete with polycarbonate [diffuser] with diffusing film. Suspension cables in steel complete with micrometric regulators in chromed brass. Protection degree IP40.

PRODUCT SPECS

| | |
|------------------------------|--------------------|
| Installation method | Suspension |
| Light source | Linea Led |
| Absorbed power | 19,8 W |
| Color temperature | 3000K |
| Color rendering index CRI | >90 |
| Finishing | White |
| Luminous flux of the product | 1004 lm |
| Luminous efficiency | 51 lm/W |
| Protocol | On/Off |
| Energy efficiency class | D |
| Weight | 1.10 Kg |
| Dimension | L925 mm |
| IP Grade | IP40 |
| Protection Class | Class II appliance |
| Power supply | 220-240V 50-60Hz |

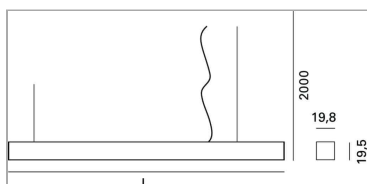

MICROFILE LED

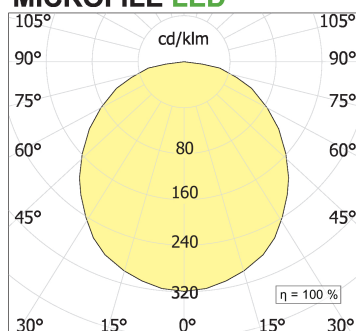

WEB PAGE



ASSEMBLY INSTRUCTIONS



