

Microfile suspension

code MF032.827/01




PRODUCT DESCRIPTION


Direct light suspension lamp, indoor, made of extruded aluminium 6060 square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules [power] assembled and wired; protocol [protocol]. Epoxy powder coated with [finish] color finish; complete with polycarbonate [diffuser] with diffusing film. Suspension cables in steel complete with micrometric regulators in chromed brass. Protection degree IP40.

PRODUCT SPECS

Installation method	Suspension
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1324 lm
Luminous efficiency	50 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	1.20 Kg
Dimension	L1220 mm
IP Grade	IP40
Protection Class	Class II appliance
Power supply	220-240V 50-60Hz

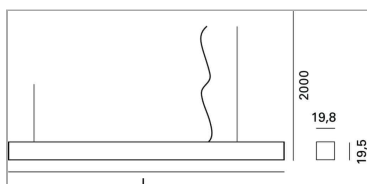

MICROFILE LED

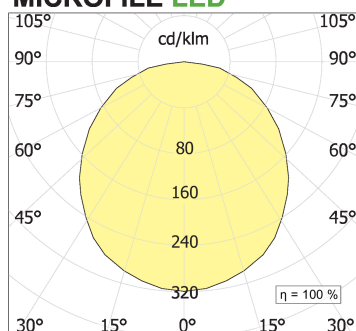

WEB PAGE



ASSEMBLY INSTRUCTIONS



