
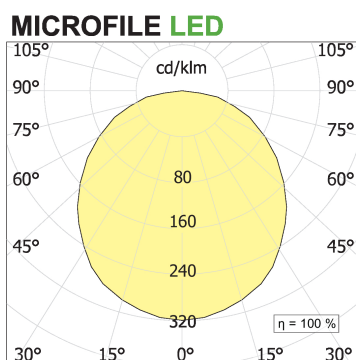


Microfile suspension

code MF033.830/01

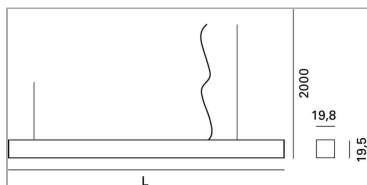

PRODUCT DESCRIPTION

Direct light suspension lamp, indoor, made of extruded aluminium 6060 square section measuring 19,8x19,5 mm; complete with led; CRI color rendering index >90. Professional led modules [power] assembled and wired; protocol [protocol]. Epoxy powder coated with [finish] color finish; complete with polycarbonate [diffuser] with diffusing film. Suspension cables in steel complete with micrometric regulators in chromed brass. Protection degree IP40.

PRODUCT SPECS

Installation method	Suspension
Light source	Linea Led
Absorbed power	33 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1600 lm
Luminous efficiency	48 lm/W
Protocol	On/Off
Energy efficiency class	D
Weight	2.20 Kg
Dimension	L1515 mm
IP Grade	IP40
Protection Class	Class II appliance
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

