


Microfile Mini Track Trimless back recessed

code MF202.827/01

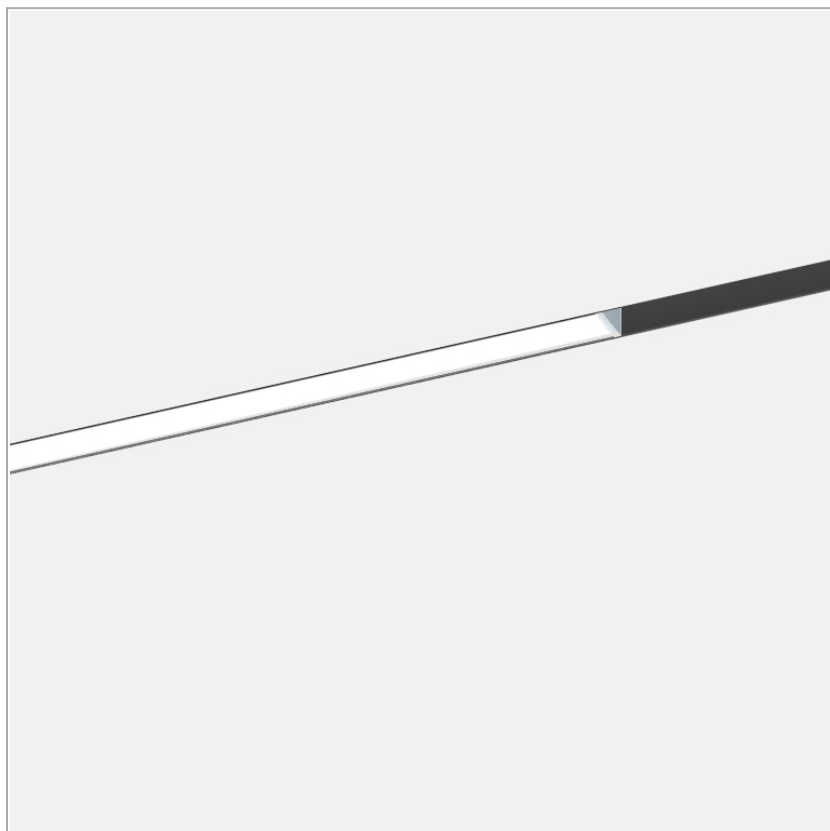


PRODUCT DESCRIPTION


Direct light lamp with backlight via Minitrack 24V (rail not included) made of extruded aluminium 6060 with square section measuring 19,8x19,5 mm; complete with led; colour rendering index CRI >90. Professional led modules 26.4 W. Protocol vedi alimentatore. Epoxy powder coated with white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

PRODUCT SPECS

Installation method	Track, Trimless back recessed
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	2700K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1324 lm
Luminous efficiency	50 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	L1220 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

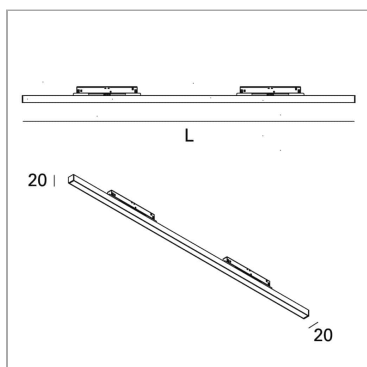

MICROFILE LED

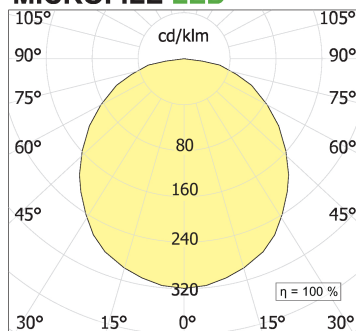

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1