


## Microfile Mini Track Trimless back recessed

code MF202.840/01

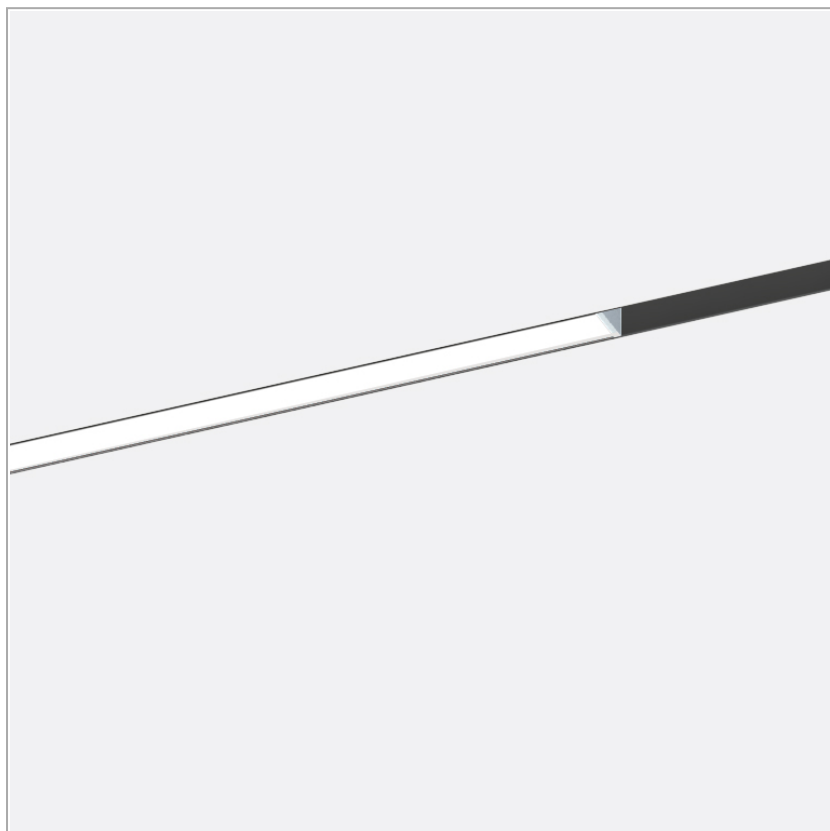


### PRODUCT DESCRIPTION


Direct light lamp with backlight via Minitrack 24V (rail not included) made of extruded aluminium 6060 with square section measuring 19,8x19,5 mm; complete with led; colour rendering index CRI >90. Professional led modules 26.4 W. Protocol vedi alimentatore. Epoxy powder coated with white color finish; complete with polycarbonate [diffusore] with diffusing film. Degree of protection IP40.

### PRODUCT SPECS

Installation method	Track, Trimless back recessed
Light source	Linea Led
Absorbed power	26,4 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminous flux of the product	1324 lm
Luminous efficiency	50 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	L1220 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

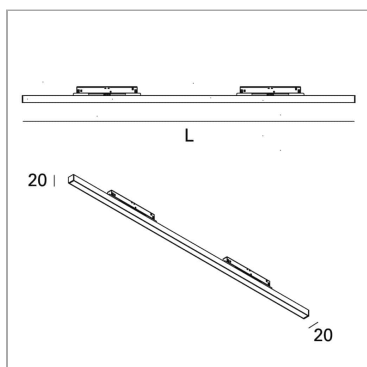

### MICROFILE LED

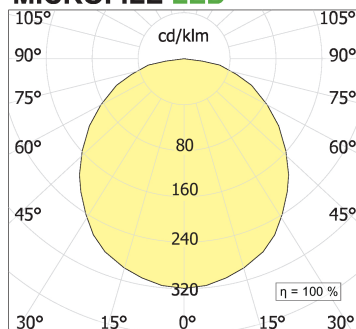

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 1