

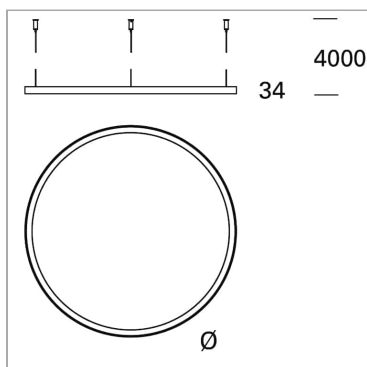


## File Flex Suspension Circle Diffused

code FXA41.840/01

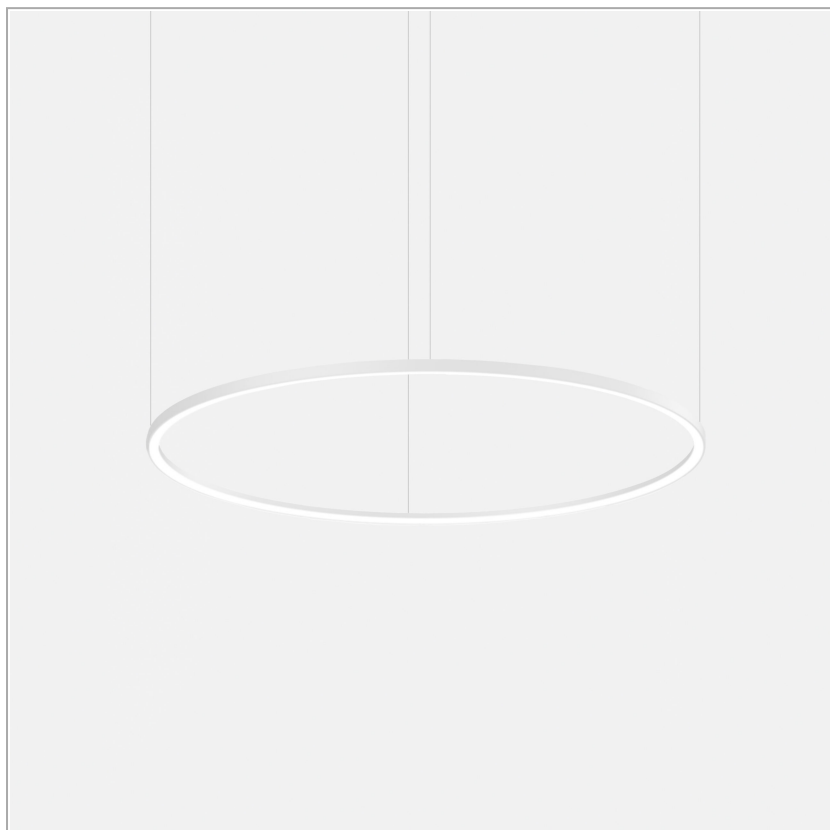

### PRODUCT DESCRIPTION

Circular shape indoor suspension lamp made of extruded 6060 aluminum, direct and diffuse light emission, complete with led 33 W, color rendering index CRI>90. Transparent round section power cable; suspension cables made of steel with millimetric regulator; Epoxy powder coating; Microtextured color white.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Suspension                      |
| Light source                 | LED                             |
| Absorbed power               | 33 W                            |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Finishing                    | White                           |
| Luminous flux of the product | 1925 lm                         |
| Luminous efficiency          | 58 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Energy efficiency class      | D                               |
| Weight                       | 2.5 Kg                          |
| Dimension                    | Ø500 mm                         |
| IP Grade                     | IP40                            |
| Protection Class             | Class III appliance             |
| Product Spec                 | Circular shape                  |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Electronic power supply



code AE50.24V

uncategorized

Technical Sheet



### Electronic power supply



code AE100.3.24V

Electronic power supply

Technical Sheet



### Electronic power supply



code AE150.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE200.24VIP

uncategorized

Technical Sheet



### Electronic power supply (Copia)



code AE100.2.24V

Electronic power supply

## OPTIONAL ACCESSORIES

### CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



### Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

Technical Sheet



### Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling

Technical Sheet



