

File Flex Suspension Circle Diffused



















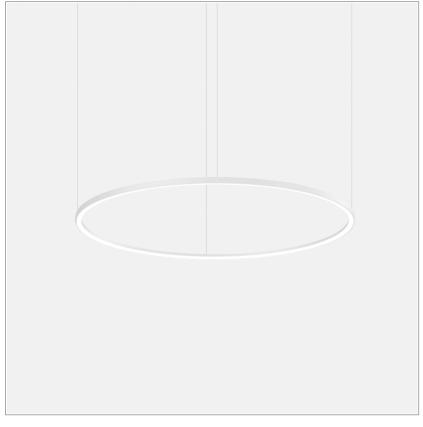

4000 34



PRODUCT DESCRIPTION

Circular shape indoor suspension lamp made of extruded 6060 aluminum, direct and diffuse light emission, complete with led 101 W, color rendering index CRI>90. Transparent round section power cable; suspension cables made of steel with millimetric regulator; Epoxy powder coating; Microtextured color white.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	101 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	5897 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 ta 25°C
Energy efficiency class	D
Weight	8 Kg
Dimension	
Dimension	Ø1500 mm
IP Grade	Ø1500 mm IP40
IP Grade	IP40
IP Grade Protection Class	IP40 Class III appliance

WEB PAGE



ASSEMBLY



MANDATORY ACCESSORIES

Electronic power supply



code AE50.24V uncategorized



Electronic power supply



code AE100.3.24V Electronic power supply



Electonic power supply



code AE150.24VIP uncategorized



Electronic power supply (Copia)



code AE200.24VIP uncategorized



Electronic power supply (Copia)



code AE200.24VIP uncategorized



Electronic power supply (Copia)

code AE100.2.24V



Electronic power supply

OPTIONAL ACCESSORIES

CANOPY CONNECTION



code LB420/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.



Lbs System Canopy for housing driver



code LB421/01

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.



Lbs System Canopy for plasterboard false-ceiling

Lbs System Canopy for plasterboard false-ceiling



code LB428/01

Lbs System Canopy for plasterboard false-ceiling



