


Incas Led Minimal 3

code IN03M.930W/01

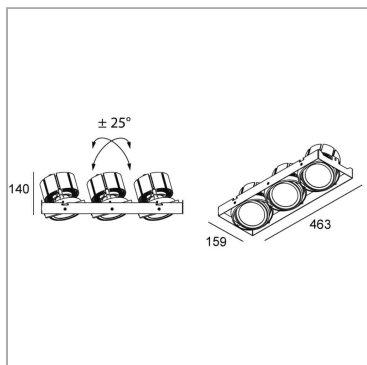

PRODUCT DESCRIPTION

Family of adjustable recessed downlight, with COB LED source, with or without frame. Square or rectangular painted steel structure with one or more light sources. Cardanic optical assembly with $\pm 25^\circ$ orientation on the two horizontal axes. The frameless version necessarily requires a subframe for installation on 13mm plasterboard false ceilings. Equipped with high-performance LEDs, with CRI > 90, high-performance passive heatsink in black anodized extruded aluminum and 99.99% pure aluminum metallized reflector. To be associated with remote stabilized current drivers. IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	3x17 W / 3x24,3 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	White
Luminous flux of the product	6004 lm / 8441 lm
Luminous efficiency	118 lm/W / 116 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Protocol	On/Off
Energy efficiency class	D / E
Dimension	L159xW463xH140 mm
Hole size	vedi accessori mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

Accessori Wallbox Frame Incas 3AM



code TEIN03M

Inspectable frame to be fit plaster in plasterboard 15mm thick for the article INCAS 3M, INCAS 3AM.
For plasterboard 13 mm tick it is necessary thicken.

Technical Sheet

