

# IFerrosi floor pole H1300-60

D


















code IF05.930W/99

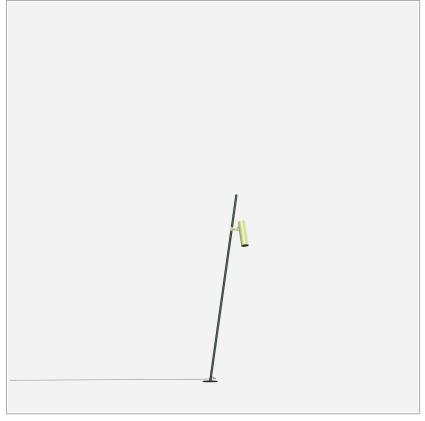





## PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

#### **PRODUCT SPECS**

Installation method	Floor
Light source	LED
Absorbed power	6,7 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Graphite
Luminous flux of the product	712 lm
Luminous efficiency	106 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Life time estimate  Protocol	
	Ta 25°C
Protocol	Ta 25°C On/Off
Protocol Energy efficiency class	Ta 25°C On/Off D
Protocol Energy efficiency class Weight	Ta 25°C On/Off D 2.6 Kg
Protocol Energy efficiency class Weight Dimension	Ta 25°C On/Off D 2.6 Kg L60xW350xH1365 mm
Protocol Energy efficiency class Weight Dimension IP Grade	Ta 25°C On/Off D 2.6 Kg L60xW350xH1365 mm Ip66
Protocol Energy efficiency class Weight Dimension IP Grade Protection Class	Ta 25°C On/Off D 2.6 Kg L60xW350xH1365 mm Ip66 Class III appliance

**WEB PAGE** 



ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

## AE700.10C



code AE700.10C

Electronic power supply current