

## Iride Mini Track 43L

code IR08.940W/01





### PRODUCT DESCRIPTION

New collection of adjustable projectors by Mario Cucinella featuring integrated LED sources, ceiling or track mounted (Stucchi tracks) both for mains voltage or 48V. Iride consists of a body in painted die-cast aluminum and an interchangeable ring – in white, black or chrome finishing – for customization. Optical groups complete with high color rendering LEDs (CRI>90), lens, anti-glare housing and electronic driver. Adjustable optical body in the track version, with the 0-90 ° orientation on the horizontal axis and 355 ° on the vertical axis; the surface mounted version offers an additional rotation possibility. Spot, flood and wide optics. IP20.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Track                           |
| Light source                 | LED                             |
| Absorbed power               | 6,7 W                           |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Wide 39°                        |
| Finishing                    | White                           |
| Luminous flux of the product | 850 lm                          |
| Luminous efficiency          | 127 lm/W                        |
| MacAdam color tolerance      | 2                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | On/Off                          |
| Energy efficiency class      | D                               |
| Dimension                    | Ø43 mm                          |
| IP Grade                     | IP20                            |
| Product Spec                 | Adjustable                      |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

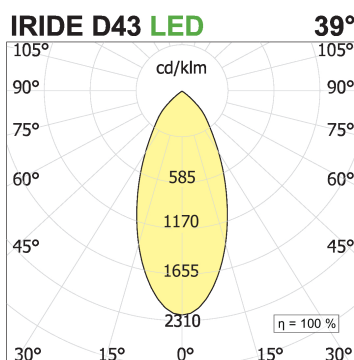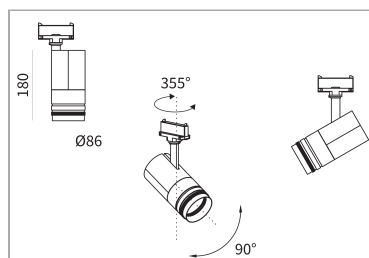

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### **Lens honey comb louver ø43**



code L043R

