

## Leva 15 recessed - kit

code LV015K..927F/01





### PRODUCT DESCRIPTION

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 32° UGR<16. Protection rating IP20.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Recessed with frame  |
| Light source                 | LED                  |
| Absorbed power               | 15x2,2 W             |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Flood 32°            |
| Finishing                    | White                |
| Luminous flux of the product | 2767 lm              |
| Luminous efficiency          | 84 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 50000h Ta 25° L90B10 |
| Energy efficiency class      | E                    |
| Weight                       | 0.30 Kg              |
| Dimension                    | L450xW27xH60 mm      |
| Hole size                    | 34X456 mm            |
| Power supply/Transformer     | Not included         |
| Protocol                     | See power supply     |

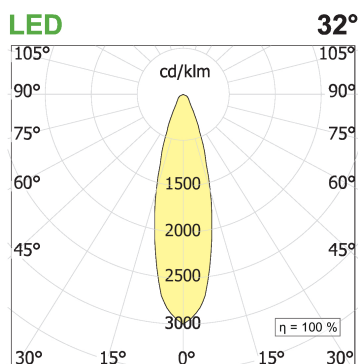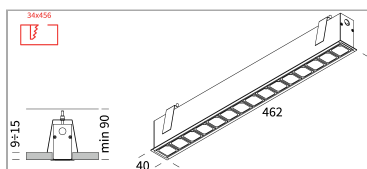

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Accessori Leva Wallbox F 15



code LV015F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling

Technical Sheet



### AE700.32C1.MP (Copia) (Copia)



code AE700.30C.MP-1


Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Wallbox for brick wall and concrete – Leva15



code CCLV15

Formwork for masonry and concrete, suitable for Leva15. Internal length 457mm - external length 459,4mm

Technical Sheet

