

Leva 15 recessed - kit

code LV015K..935Z/01





PRODUCT DESCRIPTION

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Protection rating IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	15x2,2 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White
Luminous flux of the product	3540 lm
Luminous efficiency	107 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.30 Kg
Dimension	L450xW27xH60 mm
Hole size	34X456 mm
Power supply/Transformer	Not included
Protocol	See power supply

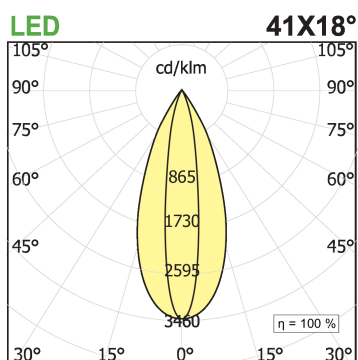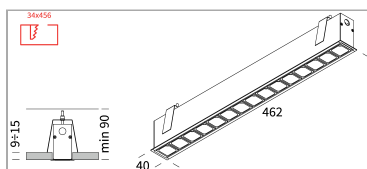

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

MANDATORY ACCESSORIES

Accessori Leva Wallbox F 15



code LV015F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling

Technical Sheet



AE700.32C1.MP (Copia) (Copia)



code AE700.30C.MP-1


Electronic power supply current

Technical Sheet



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete – Leva15



code CCLV15

Formwork for masonry and concrete, suitable for Leva15. Internal length 457mm - external length 459,4mm

Technical Sheet

