

Leva 5 Outdoor Recessed - kit


















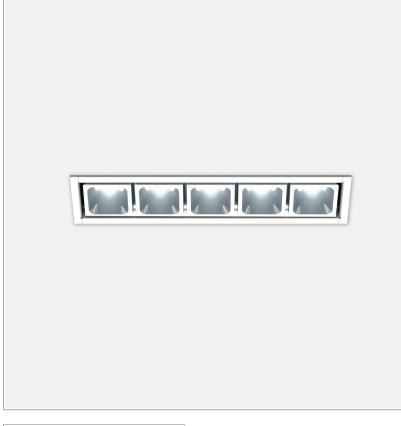



PRODUCT DESCRIPTION

Integrated LED Chip On Board light fixture. Recessed installation with stop. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 50° UGR<16.

PRODUCT SPECS

| Installation method | Recessed with frame |
|------------------------------|----------------------|
| Light source | LED |
| Absorbed power | 5x2,2 W |
| Color temperature | 3000K |
| Color rendering index CRI | >90 |
| Optic | Wide 50° |
| Finishing | White |
| Luminous flux of the product | 828 lm |
| Luminous efficiency | 75 lm/W |
| MacAdam color tolerance | 2 |
| Life time estimate | 50000h Ta 25° L90B10 |
| Energy efficiency class | E |
| Weight | 0.10 Kg |
| Dimension | L150xW27xH60 mm |
| IP Grade | lp56 |
| Protection Class | Class III appliance |
| Power supply/Transformer | Not included |
| Protocol | See power supply |
| | |





WEB PAGE







Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

MANDATORY ACCESSORIES

Box Leva 5



code LV005F/01

Recessed with frame uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete - Leva5



code CCLV05

Formwork for masonry and concrete, suitable for Leva5. Internal length 157mm - external length 159,4mm



