
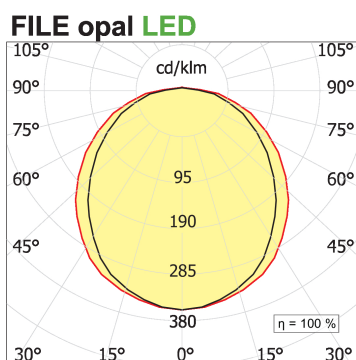


## File Suspension

code F1315.827PD/01

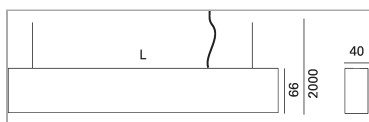

## PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 44.8 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali / Touch & Dimm. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

## PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Suspension                  |
| Light source                 | LED                         |
| Absorbed power               | 44,8 W / 19,2 W             |
| Color temperature            | 2700K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Opal polycarbonate diffuser |
| Finishing                    | White                       |
| Luminous flux of the product | 2524 lm / 1117 lm           |
| Luminous efficiency          | 56 lm/W / 58,17 lm/W        |
| MacAdam color tolerance      | 3                           |
| Life time estimate           | 50000h Ta 25° L80B10        |
| Protocol                     | Dimmble Dali / Touch & Dimm |
| Energy efficiency class      | D                           |
| Weight                       | 3.40 Kg                     |
| Dimension                    | L1985 mm                    |
| IP Grade                     | IP40                        |
| Power supply                 | 220-240V 50-60Hz            |

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS

