


## Iride recessed minimal fixed

code IR25.940/01




### PRODUCT DESCRIPTION

Recessed projector shaved indoor fixed projection, complete with led 34 W, color rendering index CRI >90. Lamp with color finish white. Lamp body and optical group made of powder-coated die-cast aluminium, springs in harmonic steel for quick installation. High performance polycarbonate lens. UGR<19

### PRODUCT SPECS

Installation method	recessed
Light source	LED
Absorbed power	34 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 36°
Finishing	White
Luminous flux of the product	3245 lm
Luminous efficiency	95 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Dimension	H98.5 Ø114 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

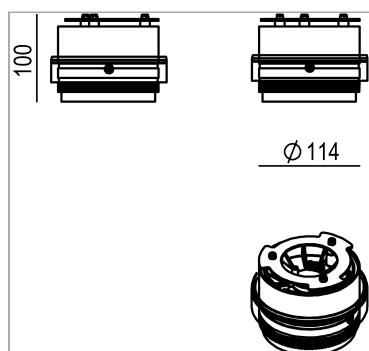

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Private:



code L114R

Non-reflective accessory lens with a honeycomb structure, diameter 86 mm.

Technical Sheet



