

Iride recessed frame adjustable


code IR22.940F/01

**PRODUCT DESCRIPTION**

Adjustable indoor recessed projector, complete with LED 26 W, colour rendering index CRI >90. Lamp with colour finish white. Lamp body and optical group made of powder-coated die-cast aluminium, springs in harmonic steel for quick installation. High performance polycarbonate lens. UGR<19

PRODUCT SPECS

Installation method	recessed with frame
Light source	LED
Absorbed power	26 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	White
Luminous flux of the product	2788 lm
Luminous efficiency	107 lm/W
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	Ø114 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

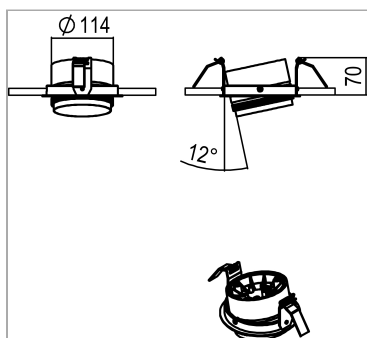**WEB PAGE****ASSEMBLY INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

OPTIONAL ACCESSORIES

Private:



code L114R

Non-reflective accessory lens with a honeycomb structure, diameter 86 mm.

Technical Sheet



