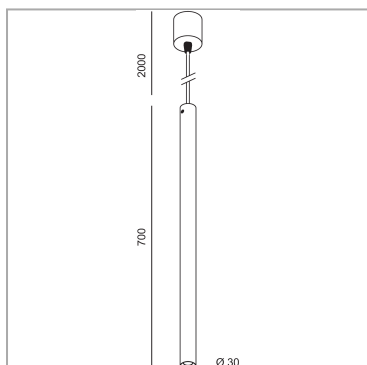


**Ipipedi R30S/700H suspension**

code PP001.927S/01

**PRODUCT DESCRIPTION**

Indoor pendant luminaire for direct lighting, complete with professional LED source that can make 1.5 W or 8 W 2700K depending on the ballast (not included). Cylindrical body in extruded aluminium painted in white colour. Complete with ceiling fixing rosette, steel suspension cables with micrometric adjustment system and power cable L.2000 m. IP20 degree of protection.

**PRODUCT SPECS**

|                              |                   |
|------------------------------|-------------------|
| Installation method          | Suspension        |
| Light source                 | LED               |
| Absorbed power               | 1,5 W / 8 W       |
| Color temperature            | 2700K             |
| Color rendering index CRI    | 90                |
| Optic                        | Spot 28°          |
| Finishing                    | White             |
| Luminous flux of the product | 123 lm / 620 lm   |
| Luminous efficiency          | 82 lm/W / 78 lm/W |
| Dimension                    | H700 Ø30 mm       |
| IP Grade                     | IP20              |
| Power supply/Transformer     | Not included      |
| Protocol                     | See power supply  |

**WEB PAGE****ASSEMBLY INSTRUCTIONS**

## OPTIONAL ACCESSORIES

### Plate for installation in plasterboard



code PP00P/01

uncategorized. Bianco finishing

Technical Sheet



