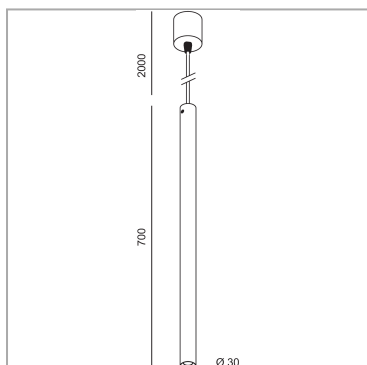


Ipipedi R30S/700H suspension

code PP001.930F/01

**PRODUCT DESCRIPTION**

Indoor pendant luminaire for direct lighting, complete with professional LED source that can make 1.5 W or 8 W 3000K depending on the ballast (not included). Cylindrical body in extruded aluminium painted in white colour. Complete with ceiling fixing rosette, steel suspension cables with micrometric adjustment system and power cable L.2000 m. IP20 degree of protection.

PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	1,5 W / 8 W
Color temperature	3000K
Color rendering index CRI	90
Optic	Flood 40°
Finishing	White
Luminous flux of the product	143 lm / 729 lm
Luminous efficiency	95 lm/W / 91 lm/W
Dimension	H700 Ø30 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE**ASSEMBLY INSTRUCTIONS**

OPTIONAL ACCESSORIES

Plate for installation in plasterboard



code PP00P/01

uncategorized. Bianco finishing

Technical Sheet



