

Leva graffa 600

code LV706P.927Z/02





PRODUCT DESCRIPTION

Integrated Chip On Board LED luminaire. Wall installation. Luminaire body in painted extruded aluminium black box - black optic. Composed of 20 optical groups complete with lens and anti-glare housing. Optics UGR<14. Degree of protection IP56.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	20x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Asymmetric 41°X18°
Finishing	Black box - black optic
Luminous flux of the product	4300 lm
Luminous efficiency	98 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Dimension	L615xW112xH62 mm
IP Grade	Ip56
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

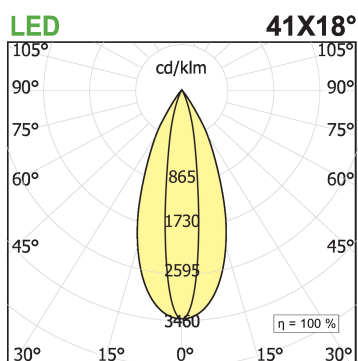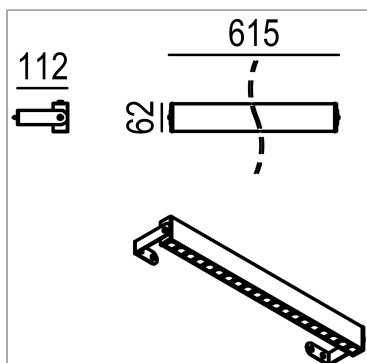


WEB PAGE



OPTIONAL ACCESSORIES

Box Driver accessory

Accessory box for the containment of power supplies. Black finish. 210x73xH68.



code LV70BX

Accessory box for the containment of power supplies. Black finish. 210x73xH68.

Technical Sheet

