

## Bucolica spot 26

code BU001.940F/02




### PRODUCT DESCRIPTION

Aluminum outdoor floodlight. Ground installation. has a 2-meter-long cable and is adjustable for tilting up to a maximum of 180°.

### PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	5,7 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	Black
Luminous flux of the product	580 lm
Luminous efficiency	102 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	E
Dimension	L53xH67 Ø26 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

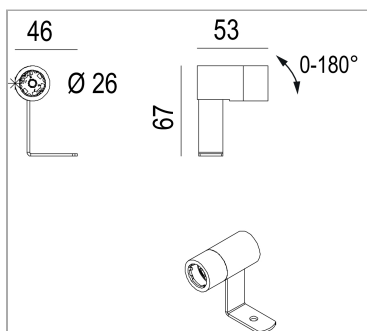

### WEB PAGE



## MANDATORY ACCESSORIES

### **AE700.14IP**



code AE700.14IP

Electronic power supply current

### **AE500.22IP (Copia)**



code AE500.14IP

Electronic power supply current

## OPTIONAL ACCESSORIES

### **Oblique cut cover Ø26**



code BU026/02


Cover accessory for Bucolica 26, diam. 29, oblique cut.

Technical Sheet



### **Short picket**

Picket H167 mm, diam.40 mm, support attachment for ground fixing.



code BU034

Picket H167 mm, diam.40 mm, support attachment for ground fixing.

Technical Sheet



