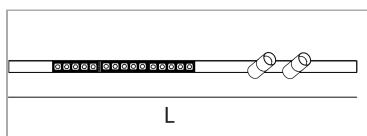


**Minifile Mix suspension light direct  
with Leva**

code MM002.927FD/01

**PRODUCT DESCRIPTION**

Indoor suspension direct light lamp made of extruded aluminum 6060, complete with 3 elements of 5x led 2.2 w beam on protected aluminum pcb, and 1 Spot complete with 8 W led, color rendering index CRI>90. Optical body made of aluminum, rotation joint 90° on horizontal axis and 355° on vertical axis, polycarbonate lens, anti-glare front snooter. Integrated power supply. Color finish white box - black optic made by epoxy powder coating. Equipped with harmonic steel springs for installation in Tools free profile. IP20 degree of protection.

**PRODUCT SPECS**

|                              |                                                           |
|------------------------------|-----------------------------------------------------------|
| Installation method          | Suspension                                                |
| Light source                 | LED                                                       |
| Absorbed power               | 15x2,2 W / 2x8 W                                          |
| Color temperature            | 2700K                                                     |
| Color rendering index CRI    | >90                                                       |
| Optic                        | Flood                                                     |
| Finishing                    | White box - black optic                                   |
| Luminous flux of the product | 2767 lm / 1101 lm                                         |
| Luminous efficiency          | 84 lm/W / 69 lm/W                                         |
| MacAdam color tolerance      | 2 / 3                                                     |
| Life time estimate           | 50000h Ta 25°<br>L90B10 / 3SDCM 50000h<br>L90 B10 Ta 25°C |
| Protocol                     | Dimmable Dali / Touch & Dimm                              |
| Energy efficiency class      | E                                                         |
| Weight                       | 2.20 Kg                                                   |
| Dimension                    | L1140xH92 Ø36 mm                                          |
| IP Grade                     | IP20                                                      |
| Power supply                 | 220-240V 50-60Hz                                          |

**WEB PAGE**