



Minifile mix ceiling direct light

code MM016.940D/01

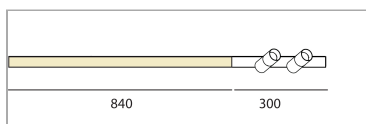

PRODUCT DESCRIPTION

Extruded aluminum profiles 62x32mm, for ceiling and suspension installation with linear LED sources, diffused light, modules with microoptics with controlled anti-glare luminance and spot focus Ø 36 mm, complete with electronic power supply 230/240V. Painted or anodized finish. Diffuser screens in opaline and side closing heads with Light Proof system. Degree of protection IP20.

Dimmable Dali / Touch & Dimm

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Linea Led
Absorbed power	19,2 W / 2x8 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	3065 lm / 1390 lm
Luminous efficiency	160 lm/W / 87 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali / Touch & Dimm
Energy efficiency class	E
Weight	2.20 Kg
Dimension	L1140xH92 mm

WEB PAGE

