

## IFerrosi straight pole H3300-120

code IF08.940F/99





### PRODUCT DESCRIPTION

Outdoor floor lamp consisting of a tubular H3197 mm. Base diameter 450 mm, complete with Ø120 spot. colour rendering index cri>90. Painted finish. IP66 degree of protection.

### PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	Graphite
Luminous flux of the product	2394 lm
Luminous efficiency	133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	16.5 Kg
Dimension	L450xW760xH3197 Ø120 mm
IP Grade	Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

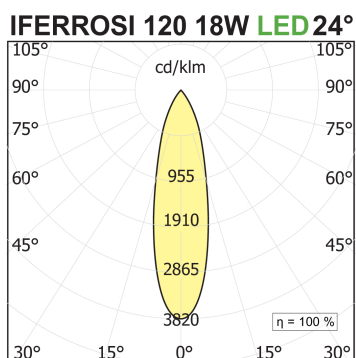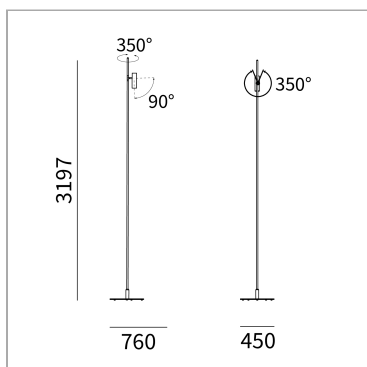

### WEB PAGE



## **MANDATORY ACCESSORIES**

### **AE500.20C1**




code AE500.20C1

Electronic power supply current

## **OPTIONAL ACCESSORIES**

### **box-for-power-suppliers IFerrosi system**



code IF76/99

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

**Technical Sheet**

