

Mini Ibrida parete H2300 + 4 spots e indiretta

code MIB034.940FD/01





PRODUCT DESCRIPTION

Wall lamp H 2345mm. Characterized by an extruded aluminium profile of 30 x 30 mm. Provided with two supports for mounting on the wall. Complete with linear led source for indirect light 17 W + 4 spots tot 22.8 W. Color finish white. Protection class IP20.

PRODUCT SPECS

Light source	LED
Absorbed power	4x5,7 W / 17 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	2600 lm
Luminous efficiency	114 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L30xW60xH2345 mm
IP Grade	IP20

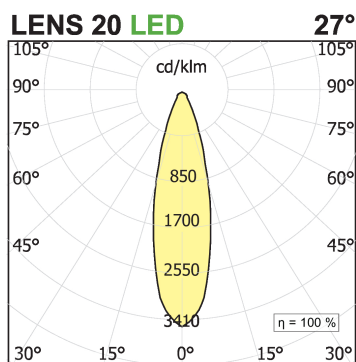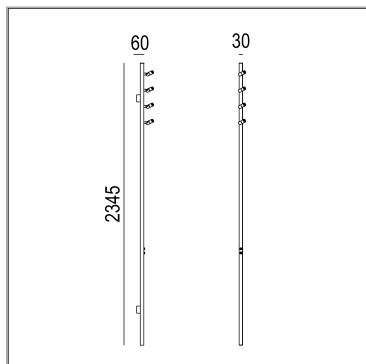

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

