

## IFerrosi straight pole H3500-60 +60

code IF07.940W/99




### PRODUCT DESCRIPTION

Outdoor floor lamp consisting of a tubular H3500mm. Base diameter 450 mm, complete with 2 Ø60 spots. colour rendering index cri>90. Painted finish of graphitecolour . IP66 degree of protection.

### PRODUCT SPECS

Installation method	Floor
Light source	LED
Absorbed power	2x6,7 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Graphite
Luminous flux of the product	990 lm
Luminous efficiency	74 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Energy efficiency class	D
Weight	16.5 Kg
Dimension	L450xW760xH3500 Ø60 mm
IP Grade	Ip66

### IFERROSI 60 6,7W LED38°

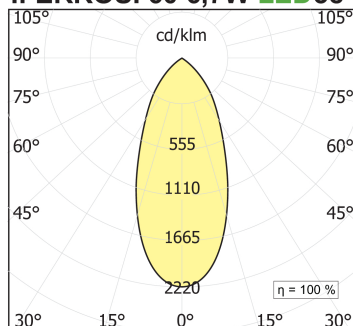

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### **box-for-power-suppliers IFerrosi system**

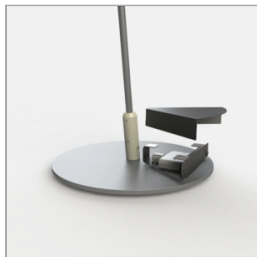

code IF76/99

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

**Technical Sheet**

