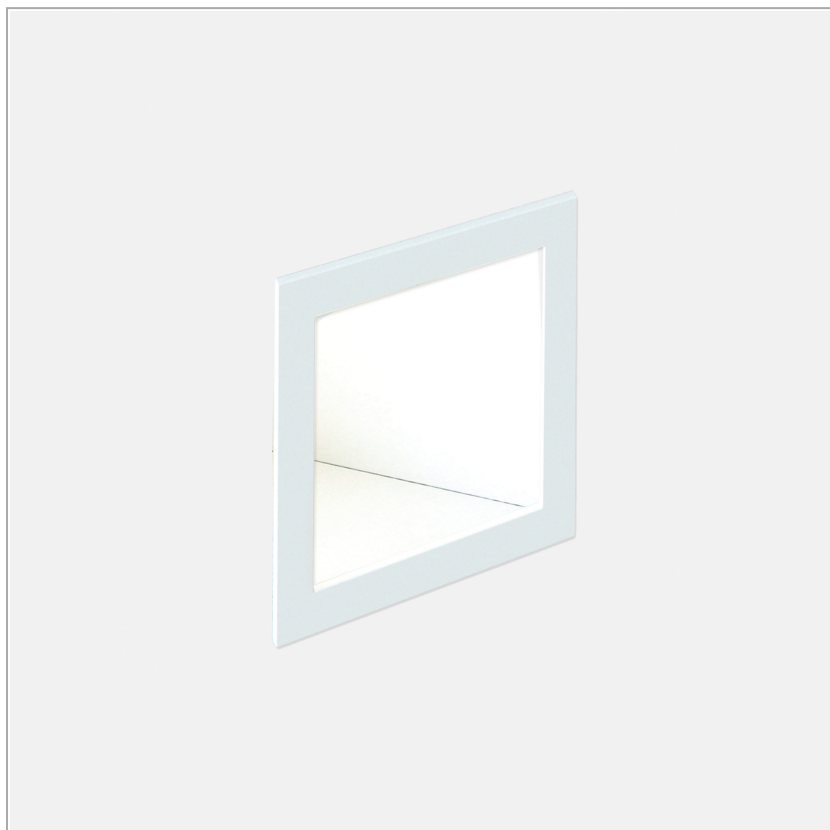


Incas 90


code IN90GU/01

**PRODUCT DESCRIPTION**

Fixed recessed luminaire for accent lighting. Body and rebate frame metal painted in white colour. It can also be installed in concrete or brick walls and ceilings by means of a galvanised sheet metal formwork available as an accessory. Suitable for lamp (not included) with GU10 230V socket. Protection class IP20.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	GU10
Absorbed power	max 50 W
Color rendering index CRI	Depending on the bulb (not included)
Finishing	White
Luminous flux of the product	Depending on the bulb (not included)
Luminous efficiency	Depending on the bulb (not included)
Energy efficiency class	E-G
Dimension	L80xW100x100 mm
Hole size	92X90 mm
IP Grade	IP20

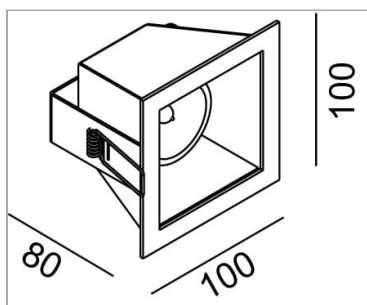**WEB PAGE****ASSEMBLY INSTRUCTIONS**

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

MANDATORY ACCESSORIES

Accessori Frosted glass diffuser




code VT/IN45.90

Collection of recessed fixture designed with square frame. Mount different light sources: halogen 12V, 230V or 1W 3W LED. Direct light or diffused light thanks to an optional frosted glass. 90 and 45 indicate the angle of light: 90° for INCAS 90 and IINCAS 90 MICRO and 45° for INCAS 45 and INCAS 45 MICRO. Available steel housing for brick walls.

Technical Sheet



Accessori Wallbox Wallbox incas 90 – 45



code CC94

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article INCAS 90,45.

Technical Sheet



