


## Nyx Trimless fixed T50F - optic group

code LTN50K.940W/01

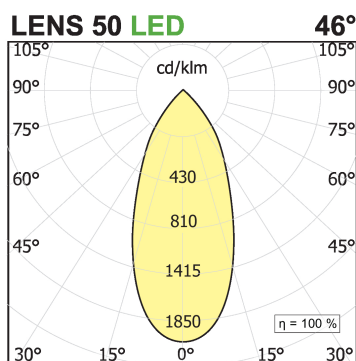

### PRODUCT DESCRIPTION

Recessed spotlight with round section for direct light ceiling installation. Optical unit made of 6060 aluminum obtained by machining on work center, Led COB 12 W or 18 W high efficiency assembled on black anodized aluminum heatsink, light source for visual comfort, 99% aluminized material optics, 9% high efficiency, fully retractable installation with special accessory mandatory. Pressure insertion with friction seal via o ring. Finish coated with epoxy powders of color white. Protection class IP20/IP54. Insulation class III. ATTENTION accessory mandatory

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Trimless recessed           |
| Light source                 | LED                         |
| Absorbed power               | 12 W / 18 W                 |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Wide 46°                    |
| Finishing                    | White                       |
| Luminous flux of the product | 1337 lm / 2291 lm           |
| Luminous efficiency          | 111 lm/W / 127 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Weight                       | 0.30 Kg                     |
| Dimension                    | H110 Ø54.5 mm               |
| Hole size                    | Ø 75 mm                     |
| IP Grade                     | IP20/54                     |
| Protection Class             | Class III appliance         |
| Product Spec                 | Circular shape              |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **Outer Casing Nyx T50 and T35D trimless for false ceiling**

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.



code LTN04A

Formwork for fixing Nyx T50F and Nyx T35D to plasterboard.

Technical Sheet



### **Frame Nyx For Brickwall T35D e T50F outer casing box for brick wall**

Frame for brick wall for Nyx T35D e T50F.



code LTN04B

Frame for brick wall for Nyx T35D e T50F.

Technical Sheet



### **AE350.16C (Copia)**



code AE350.15C

Electronic power supply current

### **AE500.20C1**



code AE500.20C1

Electronic power supply current