

Mini Sight Frame 2

code MS20.940F/01





PRODUCT DESCRIPTION

Square recessed fixture with frame, 2 lamps. Adjustable pull-out optic

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	2x12 W / 2x18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	2800 lm / 3198 lm
Luminous efficiency	117 lm/W / 89 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	On/Off
Energy efficiency class	D
Weight	1.00 Kg
Dimension	L207xW110xH135 Ø55 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply

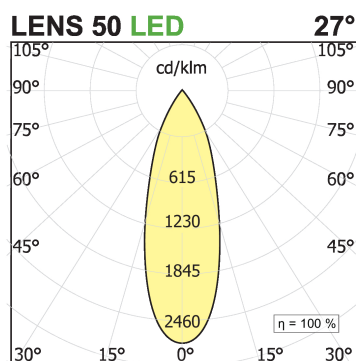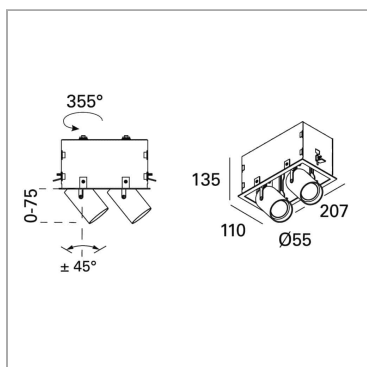

WEB PAGE



ASSEMBLY INSTRUCTIONS




Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 3

MANDATORY ACCESSORIES

Box mini sight 2



code MSC02

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit MINI sight 2.

Technical Sheet



