

Focus 2BR26 rectangular base

code FS451.940F/01




PRODUCT DESCRIPTION

Double cylindrical projector in extruded aluminium, adjustable on the vertical axis of 35°, and on the horizontal axis of +/- 90°, with rectangular base; powder coating; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, ellipsoid lens, asymmetric lens, satined lens. Color finish white.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	2x5,7 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1160 lm
Luminous efficiency	102 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	E
Dimension	W115xH120 Ø26 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

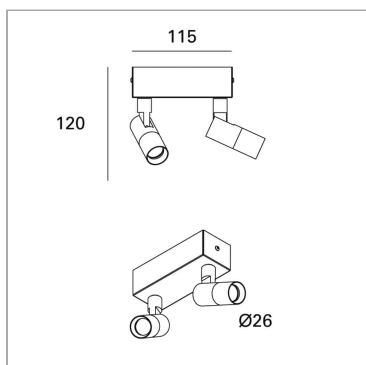

WEB PAGE



ASSEMBLY INSTRUCTIONS

