

Quadra System Surface mounted gimble body

code QS01.940/01




PRODUCT DESCRIPTION

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI > 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR < 19.

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	12 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1400 lm
Luminous efficiency	117 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	On/Off
Energy efficiency class	D
Weight	0.90 Kg
Dimension	L98xW98xH90 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

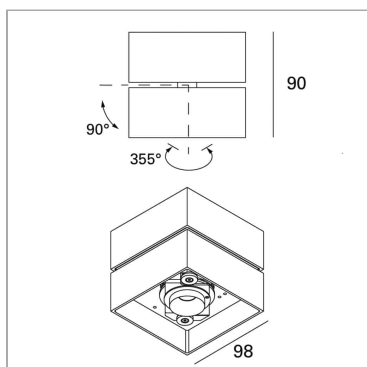

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

OPTIONAL ACCESSORIES

Accessori Quadra SPOT SNOOTER




code QM100/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet



Accessori Quadra COVER A




code QM200/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet



Accessori Quadra COVER B



code QM201/01

Selection of projectors for indoor use, with painted aluminum body, fixed and adjustable with integrated LED sources with CRI> 90. Multiple installation options: recessed with or without frame, surface mounted or on Multi System Stucchi 48V rails. Spot, flood and wide lens optics with UGR <19.

Technical Sheet

