

Focus P36 plate

code FS202.940S/01




PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminium, adjustable on the vertical axis of 355, and on the horizontal axis of +/- 90, plate base with spring for hooking to plasterboard; powder coating or galvanic treatment; with COB technology (Chip on Board) for maximum efficiency; absence of multiple shadows; Energy efficient LEDs with high color rendering; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	8 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 19°
Finishing	White
Luminous flux of the product	675 lm
Luminous efficiency	84 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H92 Ø36 mm
Hole size	Ø 52 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

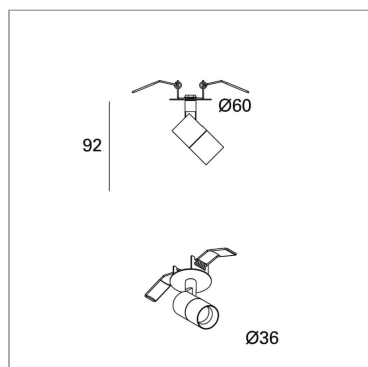

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE700.10C



code AE700.10C

Electronic power supply current