

App-eal 230V

code APEB1/01





PRODUCT DESCRIPTION

Wall-mounted fixtures for indirect diffused lighting. Complete with 230V/240V professional linear LED sources. App-line, a little shelf with indirect lighting emission. App-eal "L" shaped with direct lighting emission. Body in painted milled aluminium. Optical group complete with frosted screen. Degree of protection IP40.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	Led
Absorbed power	23 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	1880 lm
Luminous efficiency	82 lm/W
MacAdam color tolerance	3
Energy efficiency class	D
Weight	1.5 Kg
Dimension	L310xW100xH110 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

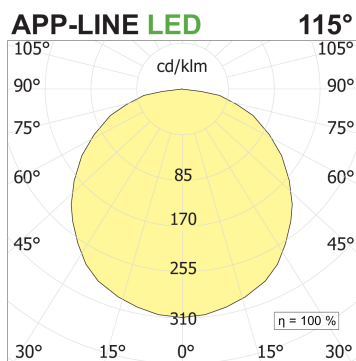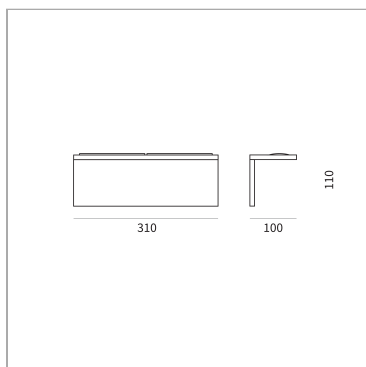

WEB PAGE



ASSEMBLY INSTRUCTIONS

