
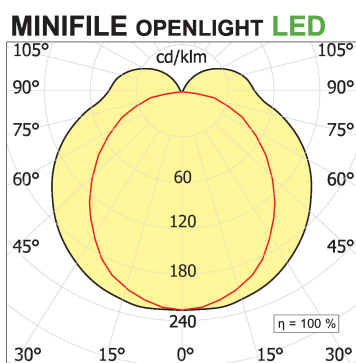


## Minifile Openlight half recessed

code MO031.827D/01



## PRODUCT DESCRIPTION

Lamp with direct and diffused light from semi-recessed indoor made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional LED modules assembled and wired on extruded aluminum heatsink equipped with harmonic steel springs for installation in the profile Tools free, wiring through 5 cables with quick-release terminal blocks; protocol Dimmable Dali. Lamp with color finish white; white opal polycarbonate screen. Degree of protection IP40/IP43.

## PRODUCT SPECS

|                              |                                            |
|------------------------------|--------------------------------------------|
| Installation method          | semi-recessed                              |
| Light source                 | LED                                        |
| Absorbed power               | 19,2 W                                     |
| Color temperature            | 2700K                                      |
| Color rendering index CRI    | >90                                        |
| Finishing                    | White                                      |
| Luminous flux of the product | 1800 lm                                    |
| Luminous efficiency          | 94 lm/W                                    |
| MacAdam color tolerance      | 3                                          |
| Life time estimate           | 50000h Ta 25° L80B10                       |
| Protocol                     | Dimmable Dali                              |
| Energy efficiency class      | E                                          |
| Dimension                    | L860 mm                                    |
| Hole size                    | 34xL+2 mm                                  |
| IP Grade                     | Inst. Parete Ip40 / Inst.<br>Soffitto Ip43 |
| Power supply                 | 220-240V 50-60Hz                           |

**WEB PAGE**



## ASSEMBLY INSTRUCTIONS

