



Minifile Openlight wall/ceiling

code MO024.840D/01



MINIFILE OPENLIGHT LED

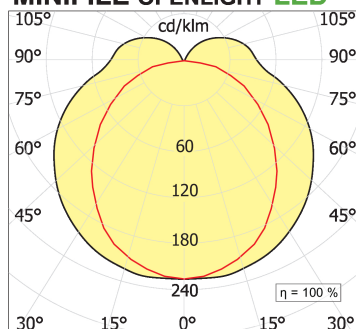

PRODUCT DESCRIPTION

Direct and diffused ceiling lamp made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional LED modules assembled and wired on extruded aluminum heatsink equipped with harmonic steel springs for installation in the profile Tools free, wiring through 5 cables with quick-release terminal blocks; protocol Dimmable Dali. Lamp with color finish white; white opal polycarbonate screen. Degree of protection IP40/IP43.

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	38,4 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	3708 lm
Luminous efficiency	97 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1700 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

WEB PAGE



ASSEMBLY INSTRUCTIONS

