


## Leva 3 trimless recessed - kit

code LV003K.927Z/01

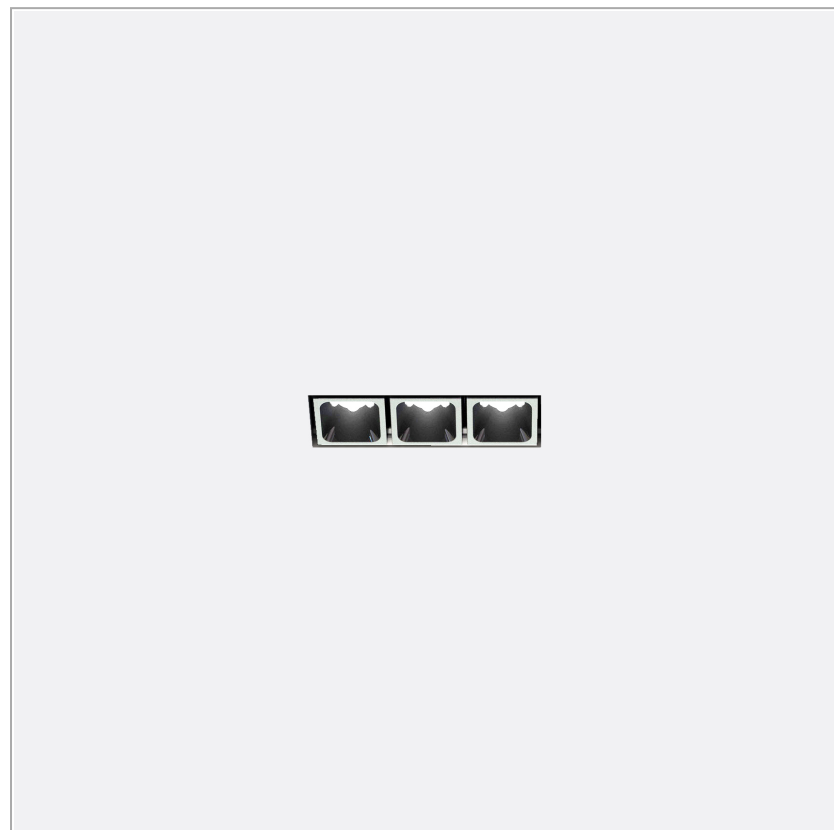

### PRODUCT DESCRIPTION

Integrated Chip On Board LED light source fixture. Full concealed, flush-mounted installation. Luminaire body in extruded painted aluminum white. Optical groups complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Protection rating IP20.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | Trimless recessed    |
| Light source                 | LED                  |
| Absorbed power               | 3x2,2 W              |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Asymmetric 41°x18°   |
| Finishing                    | White                |
| Luminous flux of the product | 645 lm               |
| Luminous efficiency          | 98 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 50000h Ta 25° L90B10 |
| Energy efficiency class      | E                    |
| Weight                       | 0.06 Kg              |
| Dimension                    | L90xW27xH60 mm       |
| Hole size                    | 32X96 mm             |
| IP Grade                     | IP20                 |
| Protection Class             | Class III appliance  |
| Product Spec                 | Rectangular shape    |
| Power supply/Transformer     | Not included         |
| Protocol                     | See power supply     |



### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Box Leva 3 trimless



code LV003A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



### AE700.11C



code AE700.11C

Electronic power supply current

## OPTIONAL ACCESSORIES

### Wallbox for brick wall and concrete – Leva3



code CCLV03

Formwork for masonry and concrete, suitable for Leva3. Internal length 97mm - external length 99,4mm

Technical Sheet



