


## Lbs System Half-ring for internal perimetric emission

code LB321/01

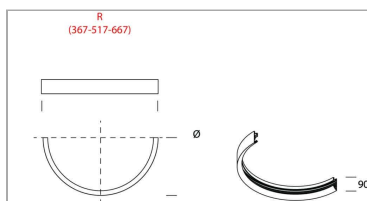

### PRODUCT DESCRIPTION

Extruded aluminum curved profiles programme. Profile dimensions: 90 x 30 mm and radius 367 mm - 517 mm - 667 mm Available in round suspended, ceiling-mounted and trimless recessed versions (default modules), in arc-shaped wall-mounted version (default module), or as modules to assemble together to form a sinusoidal system, ceiling-mounted or suspended. Available with the following lighting emissions: horizontal from the internal or external side of the profile, direct/diffused and indirect, provided by strip led (driver to be installed remote in a separate ceiling canopy or onto the false-ceiling) or by led batten with integrated driver (on direct/diffused lighting emission only). Opal white polycarbonate diffuser. The profile can be integrated with chip on board led adjustable projectors (remote driver), to be hung to the on the profile. Degree of protection IP40/IP43.

### PRODUCT SPECS

|                     |          |
|---------------------|----------|
| Installation method | system   |
| Finishing           | White    |
| Dimension           | Ø1034 mm |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 1