
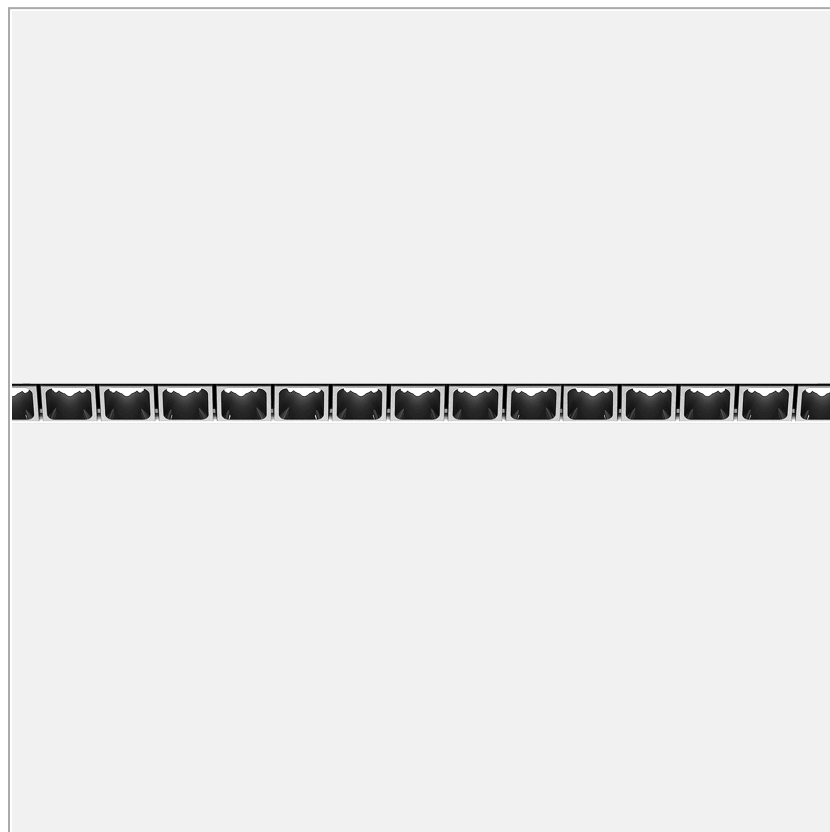


Leva 15 trimless recessed - kit

code LV015K.940Z/01





PRODUCT DESCRIPTION

Luminaire for integrated LED Chip On Board sources. Flush-mounted installation. Luminaire body in extruded painted aluminium white. Optical units complete with LED chip on board, lens, anti-glare housing. Optics 41°x18° UGR<16. Degree of protection IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	15x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Asymmetric 41°x18°
Finishing	White
Luminous flux of the product	3330 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Energy efficiency class	E
Weight	0.30 Kg
Dimension	L450xW27xH60 mm
Hole size	32X458 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Rectangular shape
Power supply/Transformer	Not included
Protocol	See power supply

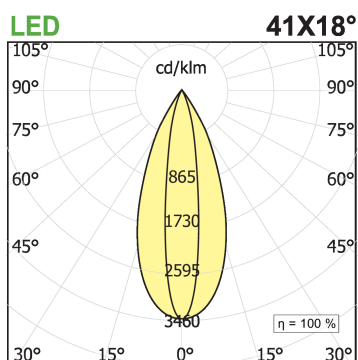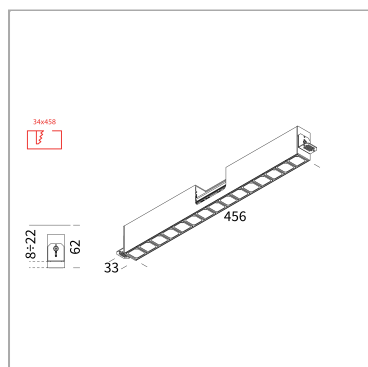

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

Accessori Leva Timless box 15



code LV015A/01

Trimless recessed uncategorized wallbox for false ceiling. Bianco finishing wallbox for false ceiling

Technical Sheet



AE700.32C1.MP (Copia) (Copia)



code AE700.30C.MP-1

Electronic power supply current

Technical Sheet



OPTIONAL ACCESSORIES

Wallbox for brick wall and concrete – Leva15



code CCLV15

Formwork for masonry and concrete, suitable for Leva15. Internal length 457mm - external length 459,4mm

Technical Sheet



