
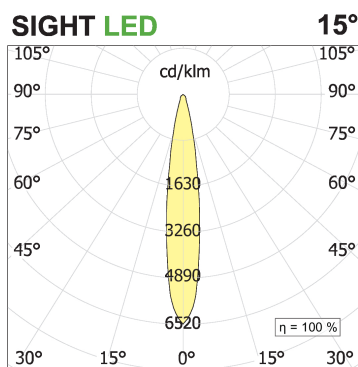


Sight Frame 3F

code LT4309.927S/01

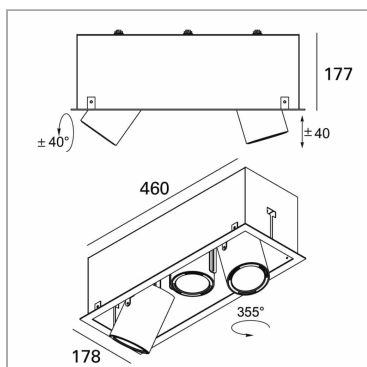

PRODUCT DESCRIPTION

Recessed downlight for wall and ceiling installation, IP20/IP23, adjustable, for accent lighting. Available in version with frame or trimless. Body optical group and frame in painted or chromed metal. Optical group adjustable 355° vertically and +/- 40° horizontally. Remote power-supply available as an accessory. Multi-lamp models set up for separate switching. It can also be completed with painted metal box for ceiling and hanging installation. It can also be installed in concrete or brick walls through specific galvanized steel wall-box, available as an accessory.

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	3x17 W / 3x24,3 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminous flux of the product	5161 lm / 7379 lm
Luminous efficiency	101 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Protocol	On/Off
Energy efficiency class	D / E
Dimension	L460xW178xH177 mm
Hole size	470x162 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

OPTIONAL ACCESSORIES

Accessori Ceiling Box Metal box for external installing box 3

code CS.P3/01

speakers for outdoor installation

Technical Sheet



Accessori Suspension Box Metal box for surface mounting box 3

code CS.S3/01

uncategorized. Bianco finishing

Technical Sheet

