


## File Flex system - Focus Ø36 File Flex 24/48V

code FX202.935ZD10/01

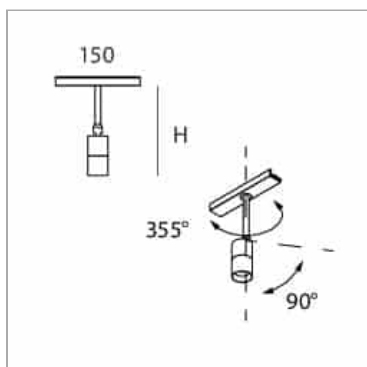

### PRODUCT DESCRIPTION

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | system                          |
| Light source                 | LED                             |
| Absorbed power               | 8 W                             |
| Color temperature            | 3500K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Asymmetric 18°x36°              |
| Finishing                    | White                           |
| Luminous flux of the product | 511 lm                          |
| Luminous efficiency          | 64 lm/W                         |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | Dimmable 1-10V                  |
| Energy efficiency class      | E                               |
| Weight                       | 0.32 Kg                         |
| Dimension                    | W150xH212 Ø36 mm                |
| IP Grade                     | IP20                            |
| Protection Class             | Class III appliance             |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1