

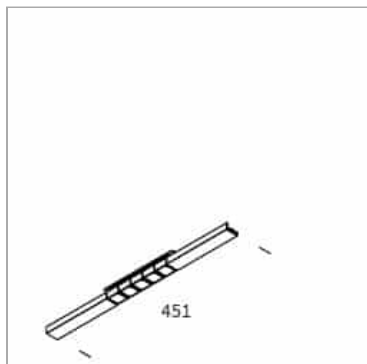


**File Flex sistema - Leva 5 File Flex
24/48V**

code FX210.927FD10/01

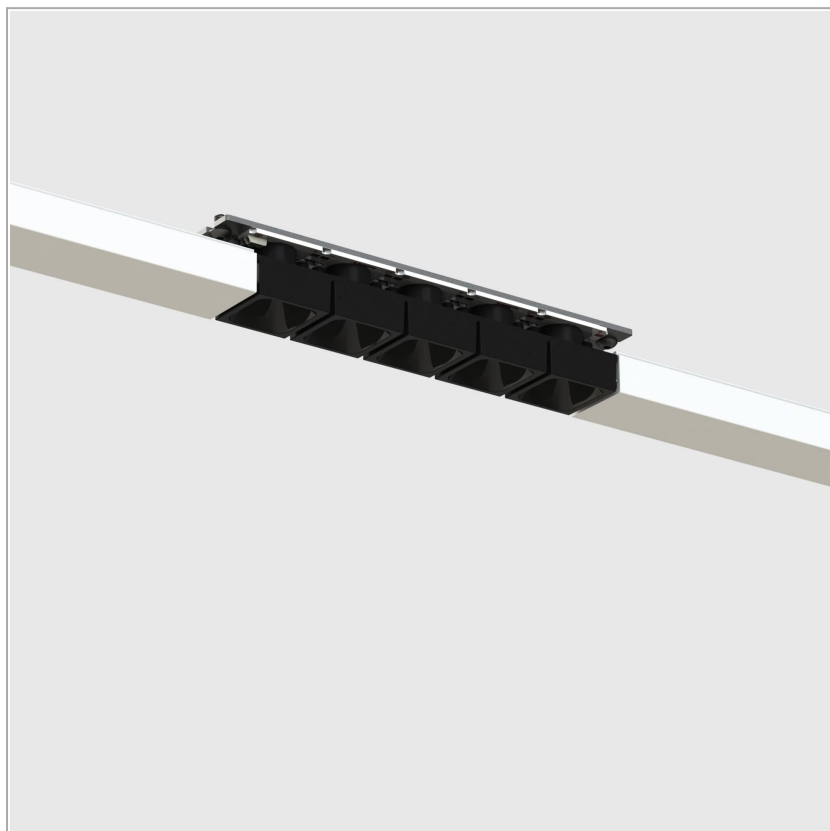

PRODUCT DESCRIPTION

REGISTERED DESIGN - File Flex is a versatile extruded aluminium profile, which can design infinite shapes. Its asymmetrical section is designed to realize unique lighting effects meanwhile ensuring optimal illumination levels. The linear LED source screened by a flexible opal extruded silicone diffuser creates seamless lighting effects. The system allows the use of blind modules, multi-optic from Leva series or adjustable spot from Spot Focus series Ø26 and Ø36. It has to be completed by stabilized drivers 24V or 48V.

PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	5x2,2 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Flood 32°
Finishing	White box - black optic
Luminous flux of the product	922 lm
Luminous efficiency	84 lm/W
MacAdam color tolerance	3
Life time estimate	60.000H L80 B10
Protocol	Dimmable 1-10V
Weight	0.2 Kg
Dimension	L451xW30xH28 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances $\pm 10\%$. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1