
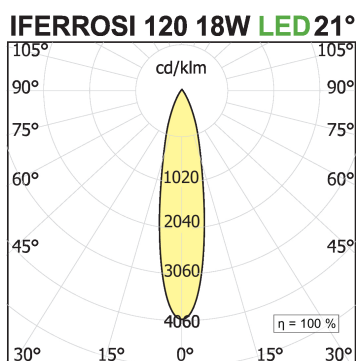


IFerrosi spot 120

code IF20.927S/44C

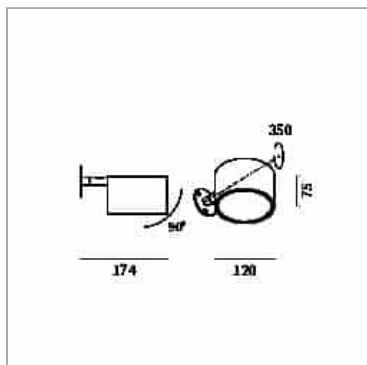

PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	18 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Spot 21°
Finishing	Champagne gold
Luminous flux of the product	1626 lm
Luminous efficiency	90 lm/W
Life time estimate	50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	1.3 Kg
Dimension	L174xH75 Ø120 mm
IP Grade	Ip66 / Ip66
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



MANDATORY ACCESSORIES

AE500.20C1



code AE500.20C1

Electronic power supply current

