

## IFerrosi spot 60

code IF21.930W/44C





### PRODUCT DESCRIPTION

Family of outdoor floor or wall luminaires, available in finished modules or in a modular system for maximum customization. Versions with LED source projectors for accent light are available. Poles of different heights from 700mm to 3000mm are available, to be combined with spots of 6.7W or 18W. Fixing base or possibility to install in different surfaces: flange for wooden surfaces, clamp for concrete and stake for ground. IP54.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	6,7 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	Champagne gold
Luminous flux of the product	712 lm
Luminous efficiency	106 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	0.3 Kg
Dimension	H200 Ø60 mm
IP Grade	Ip66 / Ip66
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

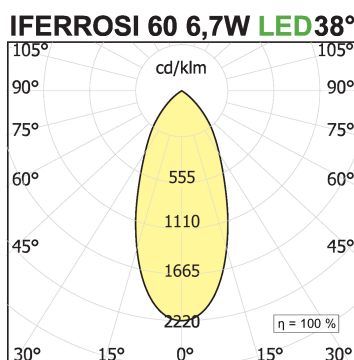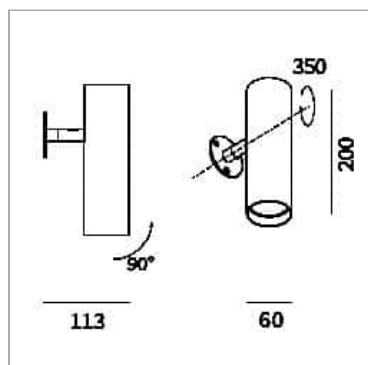

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## **MANDATORY ACCESSORIES**

### **AE700.10C**



code AE700.10C

Electronic power supply current