
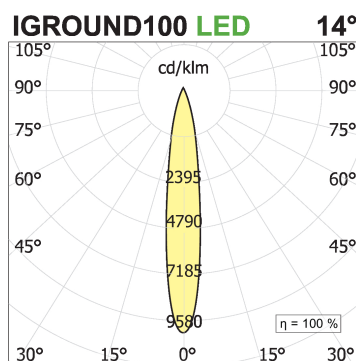


Iground Adjustable 100

code IG005C.940S/20

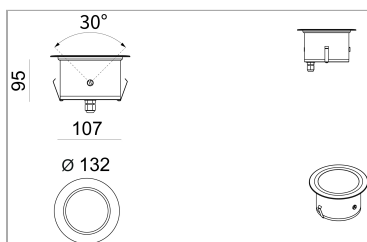

PRODUCT DESCRIPTION

Collection of walk-over recessed floor luminaires with integrated Chip On Board LED sources with monochromatic emission, fixed or adjustable optics. The tilting is obtained without having to open the article, thanks to a mechanical movement located on the lamp body. The body, circular in shape, is available in three sizes Ø 65 mm, Ø 84 mm, Ø 132 mm and made of anodized aluminum, with an AISI 316L stainless steel flange, complete with extra-clear tempered safety glass, without visible screws. The fixtures are supplied with 2 meters of neoprene cable. Additional 5m, 10m, 15m or 20m cable is available up upon request. Cylindrical outer casings available. IP67.

PRODUCT SPECS

Installation method	Recessed with frame, Floor
Light source	LED
Absorbed power	12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 19°
Finishing	Brushed steel
Luminous flux of the product	1055 lm
Luminous efficiency	88 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Weight	0.8 Kg
Dimension	L10000xH85 Ø132 mm
Hole size	108 mm
IP Grade	IP67 / IP67
Protection Class	Class III appliance
Product Spec	Adjustable, Walk-over, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

MANDATORY ACCESSORIES

Box IGround 100



code CCIG03

uncategorized

Technical Sheet

