




MOODWORLD, LADISPOLI
PHOTO: MARCO REGGI



FILE FLEX

A SHAPE INVENTING LIGHT



SEZIONE PROFILO/SECTION PROFILE

FILE FLEX

File Flex identifica una famiglia di apparecchi illuminanti installabili a parete, a soffitto e a sospensione, costituiti da un profilo in estruso di alluminio dalle forme curvilinee. Sono disponibili versioni con sorgente lineare LED con diffusore in silicone estruso flessibile opale per luce diffusa, versioni con proiettori LED per luce d'accento ed equipaggiati con downlight multi ottica della serie Leva. Le versioni a soffitto e a sospensione devono essere completate con accessori obbligatori. Disponibile in moduli finiti o sistema modulare.

File Flex identifies a family of lighting fixtures that can be installed on the wall, ceiling and suspended, consisting of an extruded aluminum profile with curvilinear shapes. The following options are available: with LED linear source with diffuser in extruded flexible opal silicone for diffused light, with LED spotlights for accent light and with multi-optics downlight of the Leva series. The ceiling and suspended versions must be completed with mandatory accessories. Available default modules and modular system.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



DIFFUSORE IN SILICONE OPALE / SILICON OPAL DIFFUSER

FINITURE STANDARD / STANDARD FINISHINGS



01-BIANCO/
WHITE



02-NERO/
BLACK



36-ORO/
GOLD

FINITURE PREMIUM / PREMIUM FINISHINGS



81-ORO ROSA/
ROSE GOLD



82-BRONZO/
BRONZE



83-OTTONE SATINATO /
BRUSHED BRASS

KELVIN



27 - 2700°K



30 - 3000°K



40 - 4000°K

FASCIO/BEAM



SPOT 20°



FLOOD 32°




WIDE 50°

CURVE FOTOMETRICHE/PHOTOMETRIC DATA


LUCE DIFFUSA / DIFFUSED LIGHT

FILE FLEX LED




LUCE SPOT / SPOT LIGHT


LED 20°



LED 32°




LED 50°





SQUARE CEILING

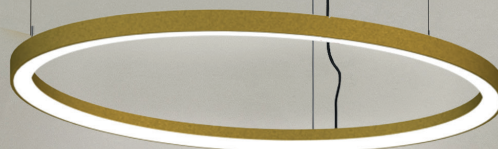

CIRCLE SUSPENSION "O"




CIRCLE SUSPENSION "V"



FILE FLEX
MODULI FINITI



CIRCLE CEILING

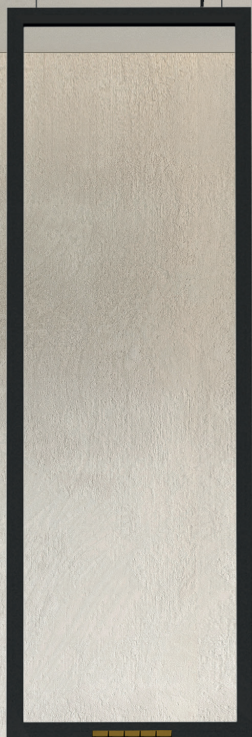

SQUARE SUSPENSION

FILE FLEX



/ STAND ALONE MODULES



MOODWORLD, LADISPOLI
PHOTO: MARCO REGGI




FILE FLEX



FILE FLEX SQUARE

SOFFITTO CEILING



VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

- 27 2700K
- 30 3000K
- 40 4000K

● FASCIO/BEAM




- S Spot 20°
- F Flood 32°
- W Wide 50°

/ ## FINITURA/FINISHING



- /01 bianco/white
- /02 nero/black
- /36 oro/gold

/ ## FINITURA PREMIUM /PREMIUM FINISHING



- /81 oro rosa shine/shine rose gold
- /82 bronzo/ bronze
- /83 ottone spazzolato/ brushed brass

COMPOSIZIONE CODICE: xxx.x ●●/##




HOW TO CREATE THE CODE: F1000.827S/01

CODE

F1000.8 ● ● /## — finishing

base code kelvin beam

FILE FLEX SQUARE SOFFITTO/CEILING P515






LED

W	mA	Dim.	H	Kg
11	700	500	1500	5

lm product/beam 3000K

S 20°	F 32°	W 50°	CODE
1000	931	828	FXP01.9 ●●●/##

FILE FLEX SQUARE SOFFITTO/CEILING P1015







LED

W	mA	Dim.	H	Kg
22	700	1000	1500	6,2

lm product/beam 3000K

S 20°	F 32°	W 50°	CODE
2000	1862	1656	FXP02.9 ●●●/##

FILE FLEX SQUARE SOFFITTO/CEILING P108







LED

W	mA	Dim.	H	Kg
22	700	1000	800	4,6

lm product/beam 3000K

S 20°	F 32°	W 50°	CODE
2000	1862	1656	FXP03.9 ●●●/##

FILE FLEX SQUARE SOFFITTO/CEILING P158




LED

W	mA	Dim.	H	Kg
22	700	1500	800	5,9

lm product/beam 3000K


S 20°	F 32°	W 50°	CODE
2000	1862	1656	FXP04.9 ●●●/##



DRIVERS VEDI | SEE P.447 **700**

FILE FLEX SQUARE

SOSPENSIONE
SUSPENSION

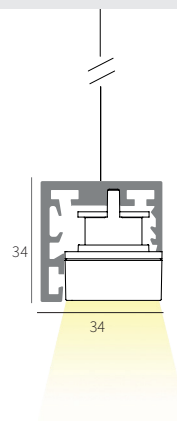

VERSIONI DISPONIBILI/AVAILABLE VERSION


● KELVIN

27 2700K

30 3000K

40 4000K

● FASCIO/BEAM



S Spot 20°

F Flood 32°

W Wide 50°

/ ## FINITURA/FINISHING



/01 bianco/white



/02 nero/black



/36 oro/gold

/ ## FINITURA ROSONI/ FINISHING CANOPY



/01 bianco/white



/02 nero/black

COMPOSIZIONE CODICE: xxx.x ●●/##

HOW TO CREATE THE CODE: F1000.827S/01

CODE

F1000.8 ● ● /## — finishing




base code

kelvin

beam

FILE FLEX SQUARE SOSPENSIONE/SUSPENSION S515





700 IP20 III UGR <16 CRI >90 A 5 UK CE



LED					lm product/beam 3000K				CODE
W	mA	Dim. H	Kg		S 20°	F 32°	W 50°		
11	700	500 1500+4000	5		1000	931	828		

FXS01.9 ● ● /##




FILE FLEX SQUARE SOSPENSIONE/SUSPENSION S1015



LED					lm product/beam 3000K				CODE
W	mA	Dim. H	Kg		S 20°	F 32°	W 50°		
22	700	1000 1500+4000	6,2		2000	1862	1656		

FXS02.9 ● ● /##





FILE FLEX SQUARE SOSPENSIONE/SUSPENSION S108



LED					lm product/beam 3000K				CODE
W	mA	Dim. H	Kg		S 20°	F 32°	W 50°		
22	700	1000 800+4000	4,6		2000	1862	1656		

FXS03.9 ● ● /##


FILE FLEX SQUARE SOSPENSIONE/SUSPENSION S158




LED					lm product/beam 3000K				CODE
W	mA	Dim. H	Kg		S 20°	F 32°	W 50°		
22	700	1500 800+4000	5,9		2000	1862	1656		

FXS04.9 ● ● /##

ROSONE OPZIONALE CON ALIMENTATORE ON/OFF/ OPTIONAL CANOPY, DRIVER ON/OFF INCLUDED



W	mA	mm	H	CODE
MAX 38W	700	358 x 32	42	FXS100/##




DRIVERS VEDI | SEE P.447

700

FILE FLEX CIRCLE

SOFFITTO
CEILING

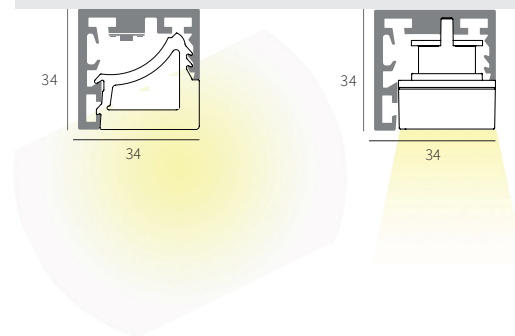

VERSIONI DISPONIBILI/AVAILABLE VERSION

- **KELVIN** ○ **KELVIN**
- 27 2700K 30 3000K
- 30 3000K 40 4000K
- 40 4000K

● FASCIO/BEAM

- S** Spot 20°
- F** Flood 32°
- W** Wide 50°

● DIMMABLE (OPTIONAL)

- D** Dali Touch & Dimm
- D10** Dimmerabile 1-10V / Dimmable 1-10V

/ ## FINITURA/FINISHING

- /01** bianco | white
- /02** nero | black
- /36** oro | gold

/ ## FINITURA PREMIUM /PREMIUM FINISHING

- /81** oro rosa shine/shine rose gold
- /82** bronzo/ bronze
- /83** ottone spazzolato/ brushed brass

VERSIONI CON LEVA | MODEL WITH LEVA

- /01** telaio bianco, ottica nera | white frame, black optic
- /02** telaio nero, ottica nera | black frame, black optic
- /41** telaio bianco, ottica bianca | white frame, white optic
- /42** telaio nero, ottica oro | black frame, gold optic


COMPOSIZIONE CODICE: xxx.x ● ● ● /##

HOW TO CREATE THE CODE: **F1000.827SD/01**

CODE
F1000.8 — **27** — **S** — **SD** / **01** — finishing
 | kelvin | beam | dimmable
 base code

FILE FLEX CIRCLE SOFFITTO/CEILING - 24V
LUCE DIRETTA E DIFFUSA / DIRECT AND DIFFUSED LIGHT

24V IP40 LED (lm) UGR <19 CRI >80 A 5 UK CE




LED

W	Ø	Kg	lm/Prod. 3000K	CODE
33	500	2,5	1886	FXA31.8 ○/##
53	800	3,9	3068	FXA32.8 ○/##
67	1000	4,8	3860	FXA33.8 ○/##
81	1200	5,9	4666	FXA34.8 ○/##
101	1500	8,0	5880	FXA35.8 ○/##
121	1800	8,9	7068	FXA36.8 ○/##
169	2500	12,2	9867	FXA37.8 ○/##
203	3000	14,8	11887	FXA38.8 ○/##


Note: Da completare con alimentatore | To be completed with power supply
 Il prodotto di diametro 2500/3000 verrà consegnato in 2 o più parti assemblabili | Please note the products of 2500/3000 diameter will be delivered in 2 or more parts.

FILE FLEX CIRCLE SOFFITTO/CEILING - 48V
A LUCE DIRETTA / DIRECT LIGHT


48V IP40 LED (lm) UGR <16 CRI >90 A 5 UK CE

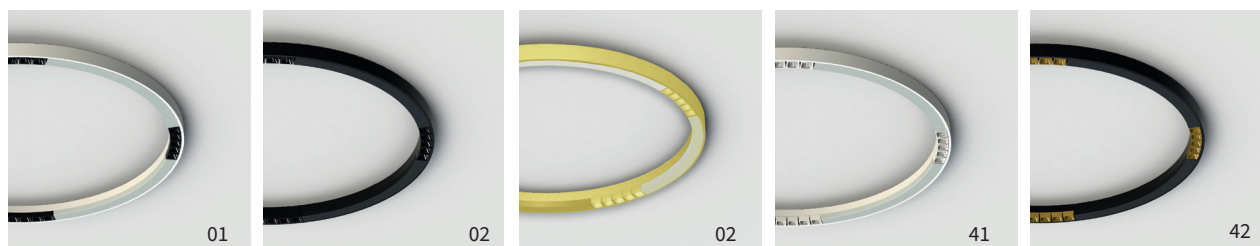

34



33W



44W



66W



77W




88W

LED

W	Ø	Kg	lm product/beam 3000K			CODE
			S 20°	F 32°	W 50°	
33	500	2,4	3000	2793	2484	FXC01.9 ●●●/##
44	800	3,8	4000	3724	3312	FXC02.9 ●●●/##
66	1000	4,7	6000	5586	4968	FXC03.9 ●●●/##
77	1200	5,8	7000	6517	5796	FXC04.9 ●●●/##
88	1500	7,9	8000	7448	6624	FXC05.9 ●●●/##

Da completare con alimentatore | To be completed with power supply
 Per le versioni D e D10 abbinare driver 48V ON/OFF. | For versions D and D10 combine 48V ON / OFF drivers



DRIVERS VEDI | SEE P.447

24V


48V



FILE FLEX CIRCLE

SOSPENSIONE SUSPENSION

CANTINA CUCINA - CEFALÙ
PHOTO ALDO BELVEDERE

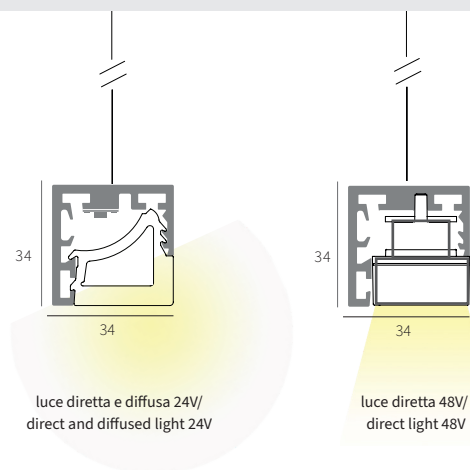

VERSIONI DISPONIBILI/AVAILABLE VERSION

- **KELVIN**
- 27 2700K
- 30 3000K
- 40 4000K

● **FASCIO/BEAM**

- S** Spot 20°
- F** Flood 32°
- W** Wide 50°

● **DIMMABLE (OPTIONAL)**

- D** Dali Touch & Dimm
- D10** Dimmerabile 1-10V / Dimmable 1-10V

/ ## **FINITURA/FINISHING**

-  /01 bianco/white
-  /02 nero/black
-  /36 oro/gold

/ ## **FINITURA PREMIUM /PREMIUM FINISHING**

-  /81 oro rosa shine/shine rose gold
-  /82 bronzo/ bronze
-  /83 ottone spazzolato/ brushed brass

VERSIONI CON LEVA/MODEL WITH LEVA

-  /01 telaio bianco, ottica nera
-  /02 telaio nero, ottica nera
-  /41 telaio bianco, ottica bianca
-  /42 telaio nero, ottica oro

COMPOSIZIONE CODICE: xxx.x ●●●●/##

HOW TO CREATE THE CODE: **F1000.827SX0/01**

CODE


F1000.8 |  |  |  |  /## — finishing

base code | kelvin | beam | diffuser | dimmable

FILE FLEX CIRCLE SOSPENSIONE/SUSPENSION - 24V

LUCE DIRETTA E DIFFUSA / DIRECT AND DIFFUSED LIGHT

24V IP40 LED UGR<19 CRI>80 A 5 UK CE



LED

W	Ø	Kg	lm/prod. 3000K	CODE
33	500	2,5	1886	FXA41.8 /##
53	800	3,9	3068	FXA42.8 /##
67	1000	4,8	3860	FXA43.8 /##
81	1200	5,9	4666	FXA44.8 /##
101	1500	8,0	5880	FXA45.8 /##
121	1800	8,9	7068	FXA46.8 /##
169	2500	12,2	9867	FXA47.8 /##
203	3000	14,8	11887	FXA48.8 /##



Da completare con rosone e alimentatore - To complete with canopy and power supply

Note: | Il prodotto di diametro 2500/3000 verrà consegnato in 2 o più parti assemblabili | Please note the products of 2500/3000 diameter will be delivered in 2 or more parts.


FILE FLEX CIRCLE SOSPENSIONE/SUSPENSION SPOT - 48V

LUCE DIRETTA/ DIRECT LIGHT

48V IP40 LED UGR<16 CRI>90 A 5 UK CE

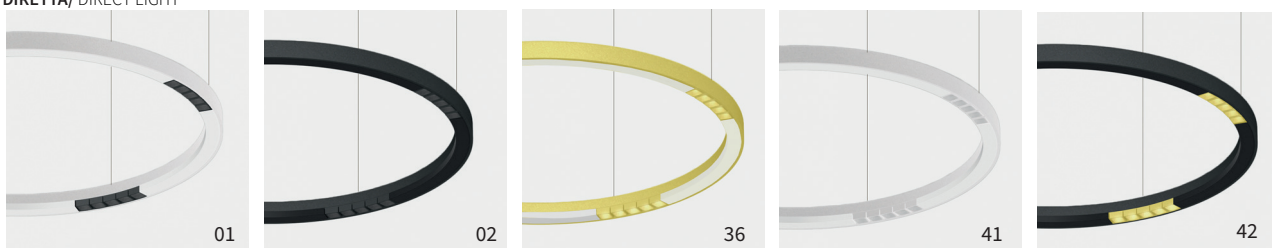

33W




44W



66W



77W



88W


LED

W	Ø	Kg	Im product/beam 3000K	CODE
33	500	2,4	20° 3000 32° 2793 50° 2484	FXC21.9 /##
44	800	3,8	4000 3724 3312	FXC22.9 /##
66	1000	4,7	6000 5586 4968	FXC23.9 /##
77	1200	5,8	7000 6517 5796	FXC24.9 /##
88	1500	7,9	8000 7448 6624	FXC25.9 /##

Da completare con rosone e alimentatore - To complete with canopy and power supply

Per le versioni D e D10 abbinare driver 48V ON/OFF. | For D and D10 version choice 48V on/off driver.

ROSONI DISPONIBILI AVAILABLE CANOPIES VEDI | SEE P.43



DRIVERS VEDI | SEE P.447


24V

48V

FILE FLEX CIRCLE

SOSPENSIONE
SUSPENSION

MED STORE - PIEDIRIPA (NO)
PROJECT: HARCOME SINDACATO - H.A. PALMIERI
PHOTO: MASSIMO ZUCCONI

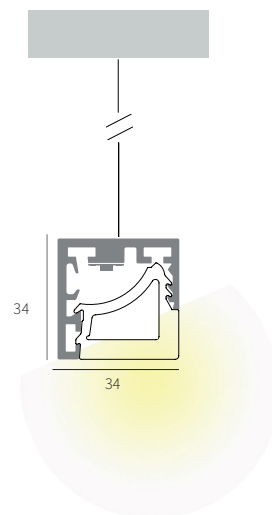

VERSIONI DISPONIBILI/AVAILABLE VERSION

● KELVIN

27 2700K

30 3000K

40 4000K

/ ## FINITURA/FINISHING

 /01 bianco/white

 /02 nero/black

 /36 oro/gold

/ ## FINITURA PREMIUM /PREMIUM FINISHING

 /81 oro rosa shine/shine rose gold

 /82 bronzo/ bronze

 /83 ottone spazzolato/ brushed brass

/ ## FINITURA ROSONI /FINISHING CANOPY

 /01 bianco/white

 /02 nero/black


COMPOSIZIONE CODICE: xxx.x ● /##

HOW TO CREATE THE CODE: F1000.827/01


CODE

F1000.8 ● /## — finishing


base code kelvin



CIRCLE C50



CIRCLE C80

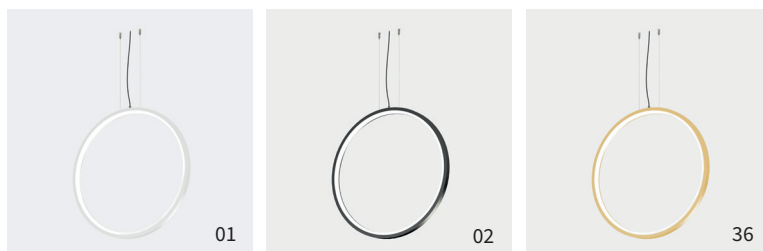


LED

W	ø mm	H mm	Kg	lm product 3000K	CODE
35	500	2000	2,8	2107	FXV21.8 ● /##
55	800	2000	4,3	3310	FXV22.8 ● /##

Da completare con rosone To complete with canopy : LB420: rosone 230V - canopy 230V - LB421: rosone per alloggiamento driver - canopy for housing driver - LB428: rosone per cartongesso - canopy for plasterboard false-ceiling. Da completare con alimentatore. To be completed with power supply


ROSONI DISPONIBILI AVAILABLE CANOPIES

ROSONE CONNESSIONE CANOPY CONNECTION




Kg	ø mm	CODE
0.11	90	LB420/##

ROSONE PER ALLOGGIAMENTO DRIVER (NON INCLUSO) CEILING CANOPY TO HOUSE THE DRIVER (NOT INCLUDED)



Kg	H mm	ø mm	CODE
0.18	42	271	LB421/##

ROSONE PER CARTONGESSO CANOPY FOR PLASTERBOARD CEILING



Kg	taglio /cut ø mm	CODE
0.11	ø 80 90	LB428/##

ROSONE RETTANGOLARE RECTANGULAR CANOPY




CODE
senza alimentatore /without driver FXS103 /##
CON alimentatore /WITH driver driver 24Vdc max 60W FXS101 /##

CAVO ALIMENTAZIONE POWER CABLE



Dim	L.mm	Kg	CODE
2x1,5	4000	2,86	FX05.4000 /##
4x1,5	4000	3,60	FX07.4000 /##



DRIVERS VEDI | SEE P.447

24V



FILE FLEX SISTEMA / *SYSTEM*







LOCATION: SINGULAR GLASS VILLENA SPAGNA
PROJECT: OSCAR VIDAL STUDIO



FILE FLEX SISTEMA/SYSTEM




PROFILO VUOTO EMPTY PROFILE





L.mm	Kg	CODE
1000	0,82	FX00.1000 /##
2000	1,64	FX00.2000 /##
3000	2,46	FX00.3000 /##
----		FX00.misura /##

PROFILO DI CHIUSURA IN ESTRUSO DI ALLUMINIO EXTRUDED ALUMINIUM CLOSING COVER



L.mm	Kg	CODE
1000	0,4	FX02.1000 /##
2000	0,8	FX02.2000 /##
3000	1,2	FX02.3000 /##
----		FX02.misura /##


DIFFUSORE IN SILICONE SILICONE DIFFUSER



L.mm	Kg/m	CODE
----- BIANCO/WHITE	0,8	FX03.misura
----- NERO / BLACK	0,8	FX03C.misura/02


Lunghezza massima 20 m - Maximum lenght 20m

TESTATE DI CHIUSURA / COUPLE OF CLOSURE HEADS




CODE
FX100 /##

KIT DI GIUNZIONE / INTERNAL JOINT



CODE
FX101

KIT SOSPENSIONE 1 CAVO ACCIAIO / SINGLE STEEL HANGING KIT



L.mm	CODE
4000	FX06.4000



CAVO DI ALIMENTAZIONE BIPOLARE PER CABLAGGIO INTERNO /INTERNAL BIPOLAR CABLE



Dim.	L.mm	CODE
2x0,75	---	FX04.misura

NOTE: Da ordinare della lunghezza totale dello sviluppo della composizione

REGOLATORE ORIZZONTALE PER SOSPENSIONE/ ANTI SWINGING FOR SUSPENSION **NEW**



CODE
FX06L

COPPIA DI CONNETTORI A SALDATURA RAPIDA / COUPLE OF CONNECTORS FAST WELDING



CODE
FX103

CURVA TIPO A IN ESTRUSO DI ALLUMINIO

CURVE TYPE A




314

Kg
0,45

CODE
FX01A/##

CURVA TIPO B IN ESTRUSO DI ALLUMINIO

CURVE TYPE B





314

Kg
0,45

CODE
FX01B/##

CURVA TIPO C IN ESTRUSO DI ALLUMINIO

CURVE TYPE C



314

Kg
0,45

CODE
FX01C/##

CURVA TIPO D IN ESTRUSO DI ALLUMINIO

CURVE TYPE D



314

Kg
0,45

CODE
FX01D/##

GUIDA ALLE SCELTA DELLE CURVE CURVES CHOICE GUIDE



CURVA TIPO B/ CURVE TYPE B



CURVA TIPO D/ CURVE TYPE D



CURVA TIPO C/ CURVE TYPE C



CURVA TIPO A/ CURVE TYPE A



/ ## FINITURA STANDARD /STANDARD FINISHING


-  /01 bianco/white
-  /02 nero/black
-  /36 oro /gold

/ ## FINITURA PREMIUM /PREMIUM FINISHING

-  /81 oro rosa shine/shine rose gold
-  /82 bronzo/ bronze
-  /83 ottone spazzolato/ brushed brass


ROSONI DISPONIBILI AVAILABLE CANOPIES

ROSONE CONNESSIONE / CANOPY CONNECTION




Kg	ø mm	CODE
0.11	90	LB420/##

ROSONE PER ALLOGGIAMENTO DRIVER / CEILING CANOPY TO HOUSE THE DRIVER



Kg	H mm	ø mm	CODE
0.18	42	271	LB421/##

ROSONE PER CARTONGESSO / CANOPY FOR PLASTERBOARD CEILING



Kg	taglio /cut ø mm	CODE
0.11	ø 80 90	LB428/##

ROSONE RETTANGOLARE / RECTANGULAR CANOPY



	CODE
SENZA alimentatore /WITHOUT driver	FXS103/##
CON alimentatore /WITH driver 24Vdc max 60W	FXS101/##


CAVO ALIMENTAZIONE / POWER CABLE




Dim	L.mm	Kg	CODE
2x0,75	4000	1,86	FX05.4000/##
4x0,75	4000	3,60	FX07.4000/##

DISPOSIZIONE ALIMENTATORI NEL ROSONE

POWER SUPPLIES POSITIONING INTO THE CANOPY ROSE CEILING

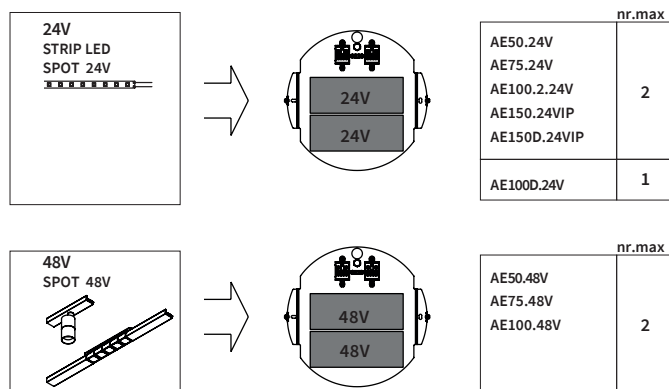

/ ## FINITURA/FINISHING	
	/01 bianco/white
	/02 nero/black




DRIVERS VEDI | SEE P.447

FILE FLEX ELEMENTI LUMINOSI

LIGHTING ELEMENTS

LINEA DI LUCE PER SISTEMI CURVI TIPO B, D e LINEARI / LED LINE FOR CURVES TYPE B, D AND LINEAR SYSTEM

24V CRI >80 ENEC



LINEA DI LUCE - LED LINE










W/m	Led/m	K	lm/m	lm/W	CRI	IP	L.mm	CODE
22	168	3000	3015	139	80	20	5000	ST22.30.5
22	168	4000	3270	139	80	20	5000	ST22.40.5

LINEA DI LUCE 3D PER CURVE TIPO A E C LED LINE 3D FOR CURVES TYPE A AND C

24V CRI >80 ENEC



W/m	W	lm/m	K	Kg	L.mm	CODE
22	11	1507	3000	0,18	500	FX260.830
		1635	4000	0,18	500	FX260.840

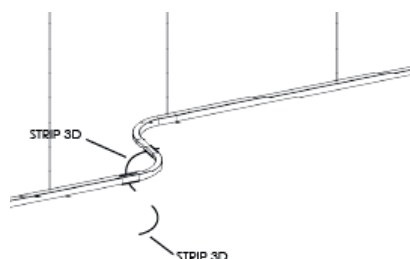


DRIVERS VEDI | SEE P.447

24V

FILE FLEX SISTEMA ELEMENTI SPOT

FILE FLEX SYSTEM SPOT ELEMENTS

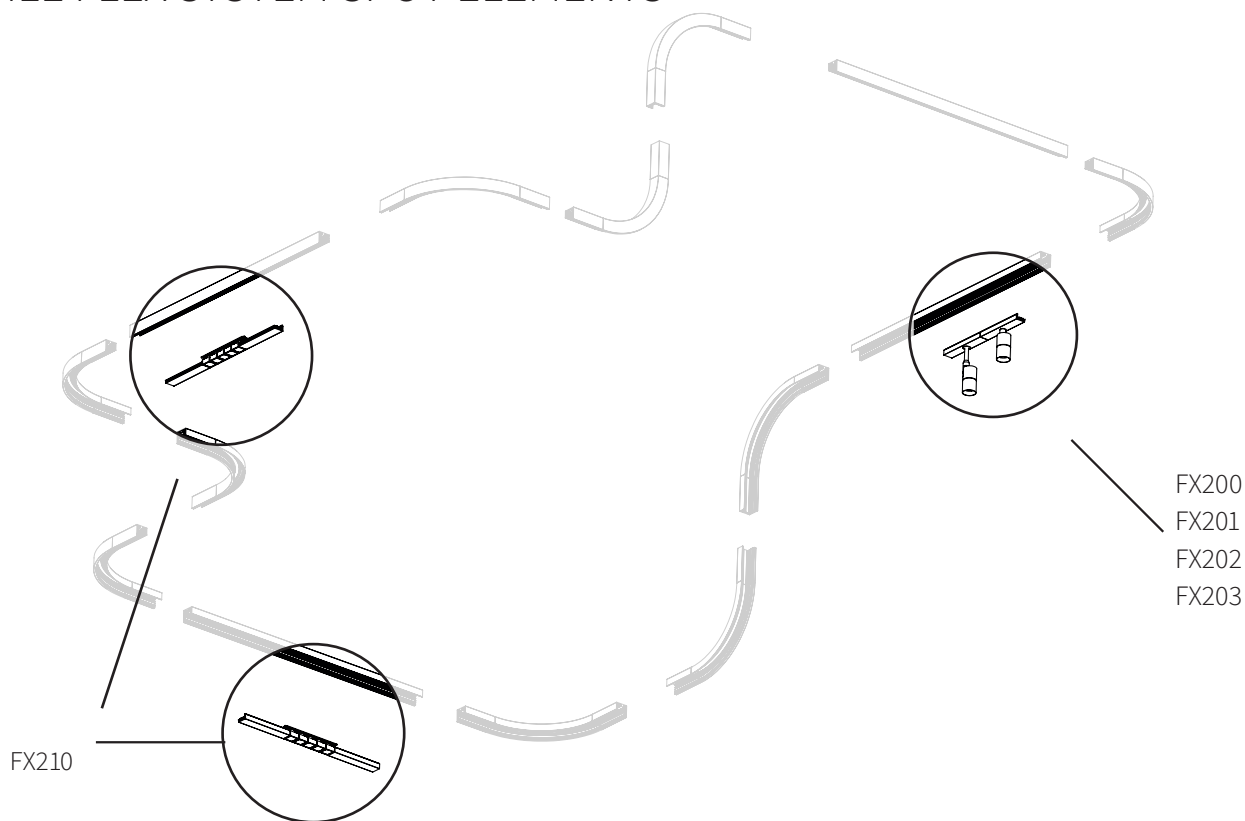

VERSIONI DISPONIBILI/AVAILABLE VERSION


● KELVIN

27 2700K

30 3000K

40 4000K

● FASCIO/BEAM



S Spot 19°

F Flood 25°

Z Asymmetric 18°x38°

○ FASCIO/BEAM



S Spot 20°


F Flood 32°

W Wide 50°

● DIMMABLE (OPTIONAL)

D Dali Touch & Dimm

D10 Dimmerabile 1-10V / Dimmable 1-10V



DRIVERS VEDI | SEE P.447

FINISHING FOCUS



/01 bianco/white



/02 nero/black



/36 oro/gold

FINISHING LEVA



/01 telaio bianco, ottica nera/white box, black optic



/02 telaio nero, ottica nera/black box, black optic



/36 telaio oro, ottica oro/gold box, golden optic



/41 telaio bianco, ottica bianca/plate box, white optic



/42 telaio nero, ottica oro/black box, gold optic

COMPOSIZIONE CODICE: xxx.x●●●/##

HOW TO CREATE THE CODE: F1000.827SXD/01


CODE

F1000.8 ● ● ● ● /## — finishing
base code kelvin beam diffuser dimmable

.misura indicare la misura necessaria in mm. /
indicate the right measure in mm.

FOCUS Ø36 FILE FLEX 24/48V PROJECTOR

24V 48V IP20 LED HIG >90 CRI >90 A 5 UK CE



Da completare con alimentatore | To be completed with power supply
Per le versioni D e D10 abbinare driver 24V/48V on/off | For D and D10 version choice 24V/48V on/off driver

LED 24/48V


W	Ø	H	Kg
8	36	92	0,30

lm product/beam 3000K

S19°	F25°	Z18°x38°	CODE	Col.
665	695	508	FX200.9	●●●/##

FOCUS Ø36 "LE NOTE" FILE FLEX 24/48V PROJECTOR

24V 48V IP20 LED HIG >90 CRI >90 A 5 UK CE







Da completare con alimentatore | To be completed with power supply
Per le versioni D e D10 abbinare driver 24V/48V on/off | For D and D10 version choice 24V/48V on/off driver

LED 24/48V

W	Ø	H	L.mm	Kg
8	36	132	150	0,3
8	36	212	150	0,32
8	36	292	150	0,35


lm product/beam 3000K

S19°	F25°	Z18°x38°	CODE	Col.
665	695	508	FX201.9	●●●/##
665	695	508	FX202.9	●●●/##
665	695	508	FX203.9	●●●/##



LEVA 5 FILE FLEX - 24/48V

24V 48V IP20 LED HIG >90 CRI >90 A 5 UK CE



LED 24/48V

W	Dim.	H	Kg
11	30X451	28	0,2


lm product/beam 3000K

S20°	F32°	W50°	CODE	Col.
1000	931	828	FX210.9	●●●/##

Da completare con alimentatore | To be completed with power supply
Per le versioni D e D10 abbinare driver 24V/48V on/off | For D and D10 version choice 24V/48V on/off driver

LEVA 10 FILE FLEX - 48V

48V IP20 LED HIG >90 CRI >90 A 5 UK CE



LED 48V

W	Dim.	H	Kg
22	30X601	28	0,3

lm product/beam 3000K

S20°	F32°	W50°	CODE	Col.
2000	1862	1656	FX211.9	●●●/##

Da completare con alimentatore | To be completed with power supply
Per le versioni D e D10 abbinare driver 48V on/off | For D and D10 version choice 48V on/off driver