



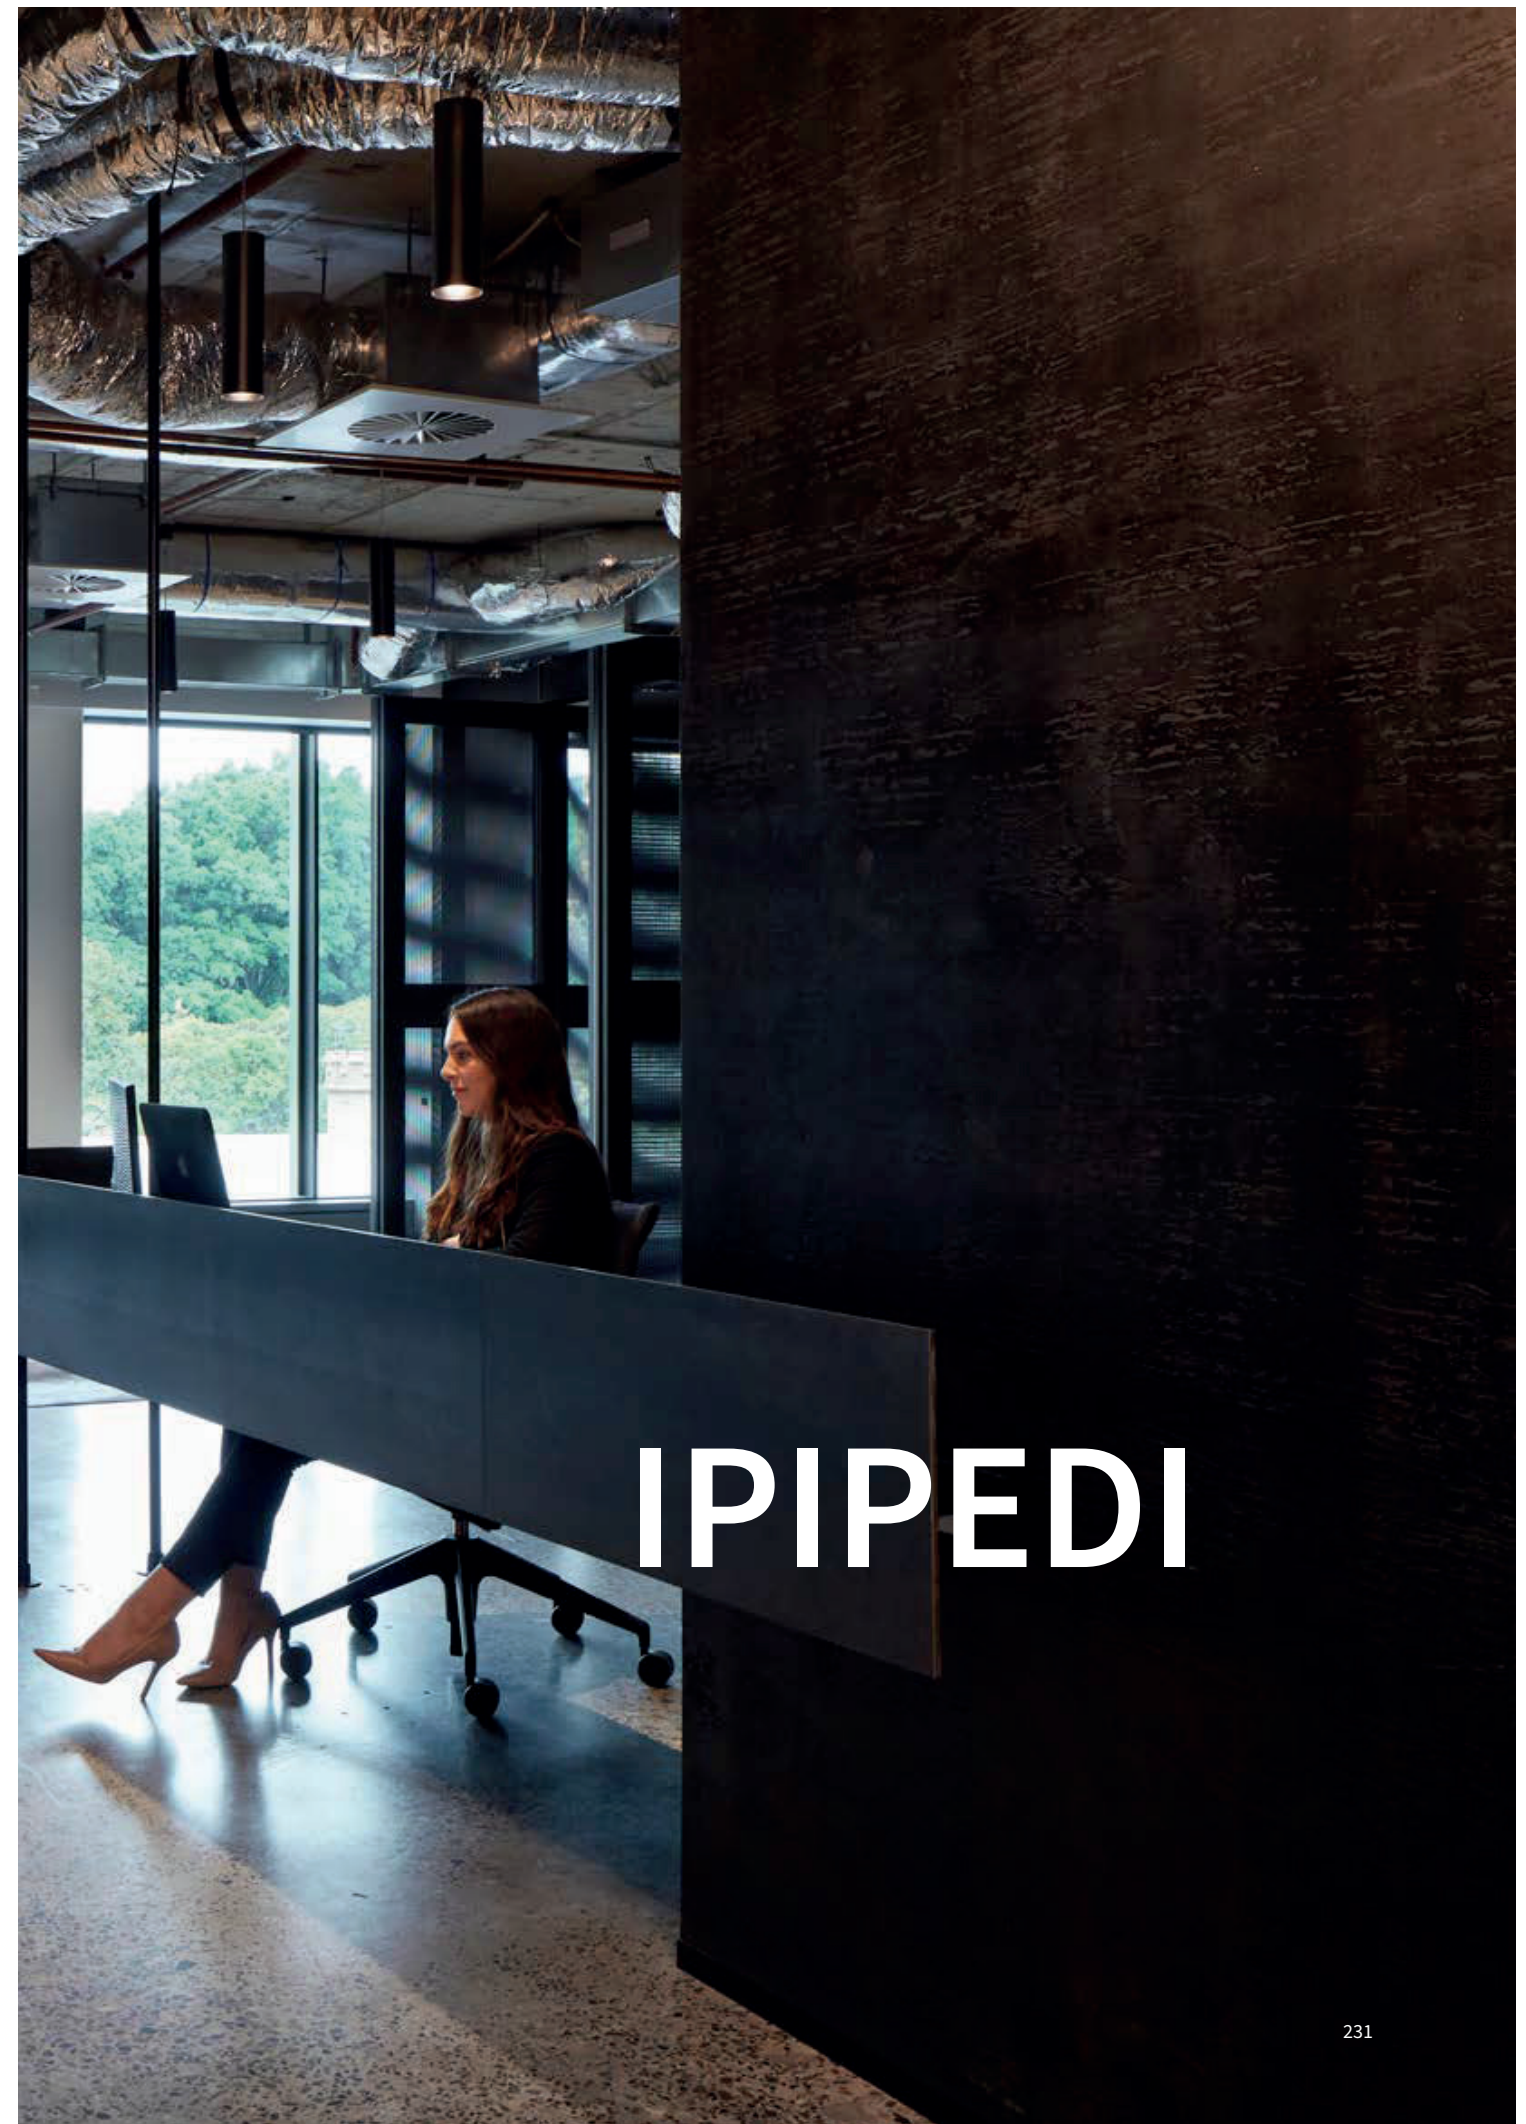

IPIPEDI

IPIPEDI

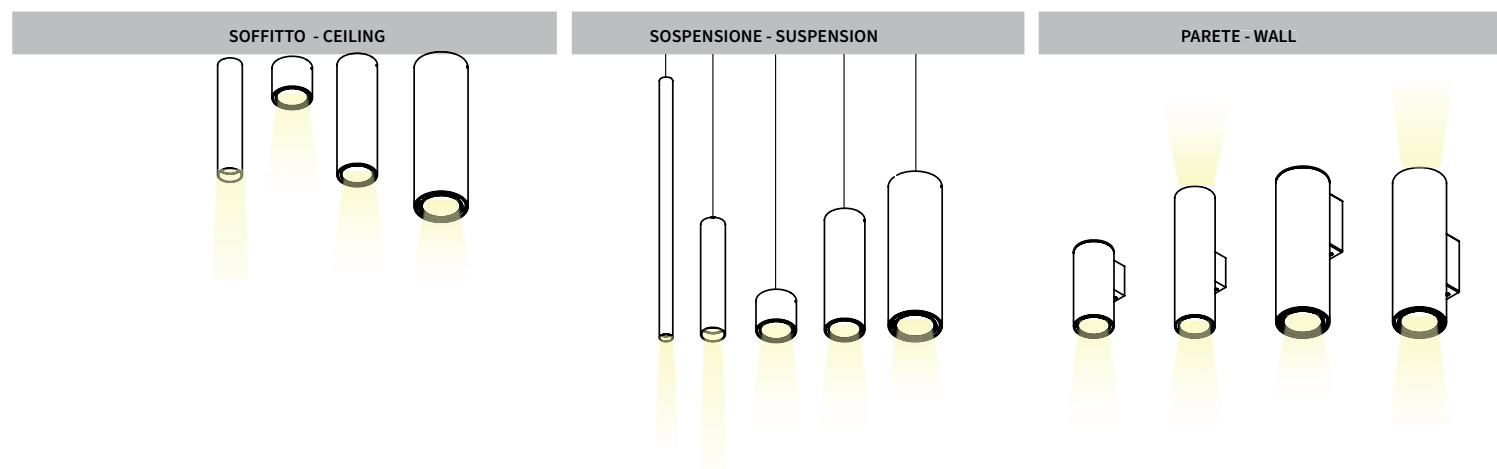

LENTI ACCESSORIE CON ANELLO / ACCESSORIES LENSES WITH RING



Apparecchi a soffitto, sospensione e parete e per binario MiniTrack 24/48V per illuminazione diretta o diretta/indiretta, completi di sorgenti LED professionali o per lampade LED GU10 230V. Completi di gruppo di alimentazione. Corpo cilindrico in estruso di alluminio finitura verniciata. Completi di staffa per fissaggio a soffitto, cavi di sospensione in acciaio con sistema di regolazione micrometrica e cavo di alimentazione L.2000 mm. o basetta di fissaggio a parete a seconda dei modelli. Grado di protezione IP20.

Ceiling, suspended or wall luminaires, available suspension for Mini Track 24/48V for direct or direct/indirect lighting, complete with professional LED sources or GU10 230V LED bulbs. Integrated power supply unit. Cylindrical body in extruded aluminum with painted finish. Complete with ceiling mounting brackets, steel suspension cables with micrometric adjustment system and power cable L.2000 mm. or wall fixing base according to the models. IP20.



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



VERSIONI CON SORGENTE LED GU10 DISPONIBILI / AVAILABLE GU10 LIGHT SOURCE VERSION

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO/BEAM

S		SPOT
F		FLOOD
W		WIDE


FINITURE STANDARD / STANDARD FINISHINGS

/01		BIANCO/WHITE
/02		NERO/BLACK
/60		CORTEN/CORTEN
/99		GRAFITE/GRAPHITE

FINITURE PREMIUM / PREMIUM FINISHINGS


/81		ORO ROSA/ROSE GOLD
/82		BRONZO ANTICATO / ANTIQUE BRONZE
/83		OTTONE BRUNITO SPAZZOLATO/ BRUSHED BURNISHED BRASS

CURVE FOTOMETRICHE/PHOTOMETRIC DATA

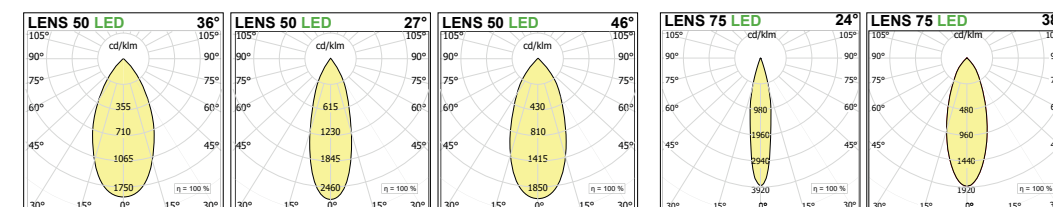

iPipedi

Sospensione | Suspension
Ø30

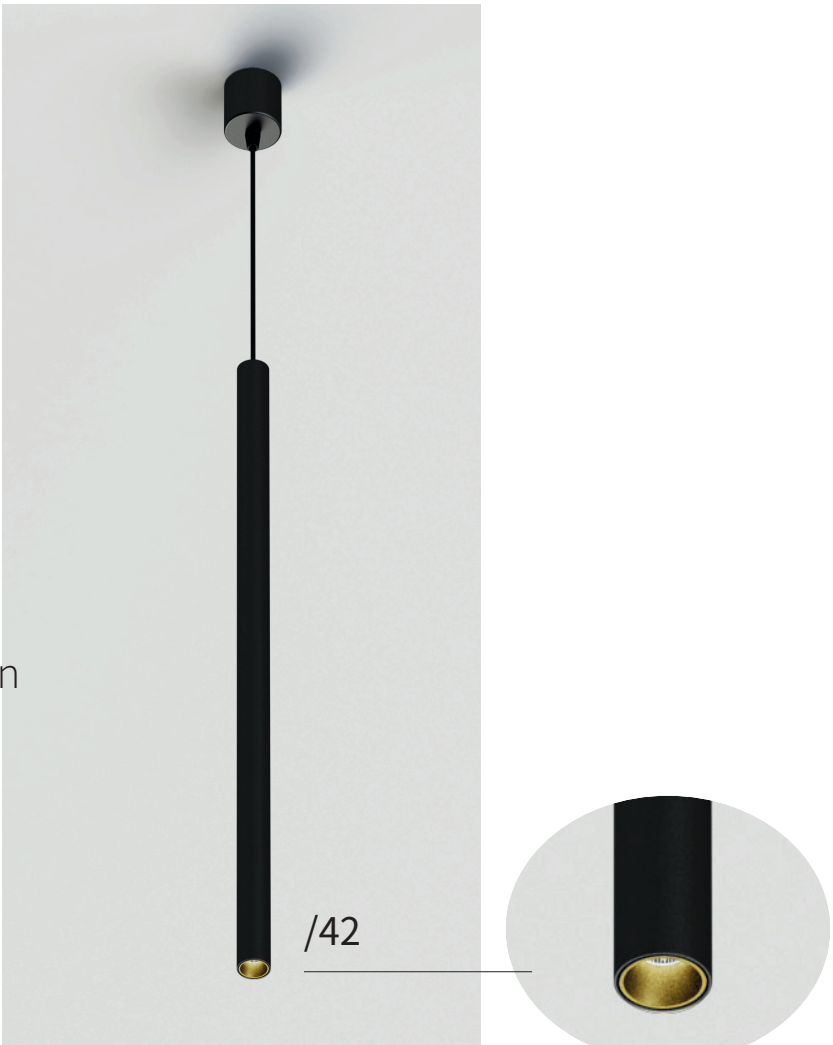


Con il suo design sottile e lungo, caratterizzato da una forma cilindrica raffinata, iPipedi Ø 30 a sospensione è pensato per creare una luce d'accento sofisticata racchiusa in soli 30 mm di diametro, perfetta per illuminare con stile ogni spazio. Con la sua versatilità, si adatta magnificamente a diverse situazioni, aggiungendo un tocco di contemporaneità e raffinatezza.

With its slim, long design, characterized by a refined cylindrical shape, the suspension iPipedi Ø 30 is designed to create a sophisticated accent light enclosed in just 30 mm in diameter, perfect for lighting up any space with style. With its versatility, it adapts beautifully to different situations, adding a touch of contemporaneity and sophistication




Ø30

IPIPEDI R30S SOSPENSIONE | SUSPENSION



LED		W	mA	ø	H	lm product/beam 3000K		CODE
S16°	F30°							
1,5	252	150	30	700	252	136	PP001.9	●●● /##
8	695	700	30	700	695	720		

ACCESSORI OPTIONAL / OPTIONAL ACCESSORIES



PIATTELLO PER INSTALLAZIONE A CARTONGESSO|
PLATE FOR INSTALLATION IN PLASTERBOARD



ø	CODE
90	PP00P/##

● KELVIN

27	2700K
30	3000K
35	3500K
40	4000K

● FASCIO/BEAM

S	Spot
F	Flood

Per i gradi vedere in tabella -
For degree check the table

/ ## FINITURA/FINISHING


□	/01 bianco/white
■	/02 nero/black
■	/42 nero e oro / black & gold
■	/60 corten /corten

PREMIUM FINISHING AVAILABLE



iPipedi
Sospensione | Suspension
Ø55 - Ø90


Ø55
IPIPEDI R55S



						LED	IP20	CRI >90	A	5	UK	CE
						Im product/beam 3000K						
W	Ø	H	Kg	F27°	W46°	CODE						
8	55	300	0,25	860	860	PP151.9	●	●	●	■	/##	
						LED	IP20	CRI >90	A	5	UK	CE
						Im product/beam 3000K						
W	Ø	H	Kg	F27°	W46°	CODE						
12	55	300	1,26	1289	1289	PP112.9	●	●	●	■	/##	
18	55	300	1,26	1579	1579	PP152.9	●	●	●	■	/##	
						GU10 LED 230V	230V 3C	IP20	A	5	UK	CE
W	Ø	H	Kg									
1x max 50	55	300	1,22									PP113 /##

Ø90
I-PIPEDI R90S H300


Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



						LED	IP20	CRI >90	A	5	UK	CE
						Im product/beam 3000K						
W	Ø	H	Kg	F24°	W38°	CODE						
17	90	300	1827	1905	PP121.9	●	●	●	■	/##		
24,3	90	300	2356	2430	PP122.9	●	●	●	■	/##		
						GU10 LED 230V	230V 3C	IP20	A	5	UK	CE
W	Ø	H	Kg									
1x max 50	90	300										PP123 /##

Accessori - accessories: L085#.A: Anello ø85 - Lens with ring ø85

IPIPEDI R90S H90



						LED	IP20	CRI >90	A	5	UK	CE
						Im product/beam 3000K						
W	Ø	H	Kg	F24°	W38°	CODE						
12	90	90	1,0	1289	-	PP155.9	●	●	●	■	/##	
17	90	90	1,4	1827	1905	PP156.9	●	●	●	■	/##	
24,3	90	90	1,4	2356	2430	PP157.9	●	●	●	■	/##	




● KELVIN		● FASCIO/BEAM		DIMMABLE (OPTIONAL)		/ ## FINITURA/FINISHING (PREMIUM AVAILABLE)	
27	2700K	F	Flood	● D	Dali	□	/01 bianco/white
30	3000K	W	Wide	■ DF	Dimm taglio di fase dimm trailing /leading	■	/02 nero/black
35	3500K					■	/60 corten /corten
40	4000K					■	/99 grafite/graphite
Per i gradi vedere in tabella - For degree check the table							

ACCESSORI / ACCESSORIES



LENTI CON ANELLO / LENSES WITH RING			Ø	Kg	CODE	/##
LENTE SATINATA / SATINED LENS			55	0,01	L055S.A	
			85	0,01	L085S.A	
LENTE ELISSOIDALE / ELIPSOID LENS			55	0,01	L055E.A	
			85	0,01	L085E.A	/01
LENTE ASIMMETRICA / ASYMMETRIC LENS			55	0,01	L055A.A	/02
			85	0,01	L085A.A	
FILTRO NIDO D'APE / HONEY COMB LOUVER			55	0,01	L055R.A	
			85	0,01	L085R.A	

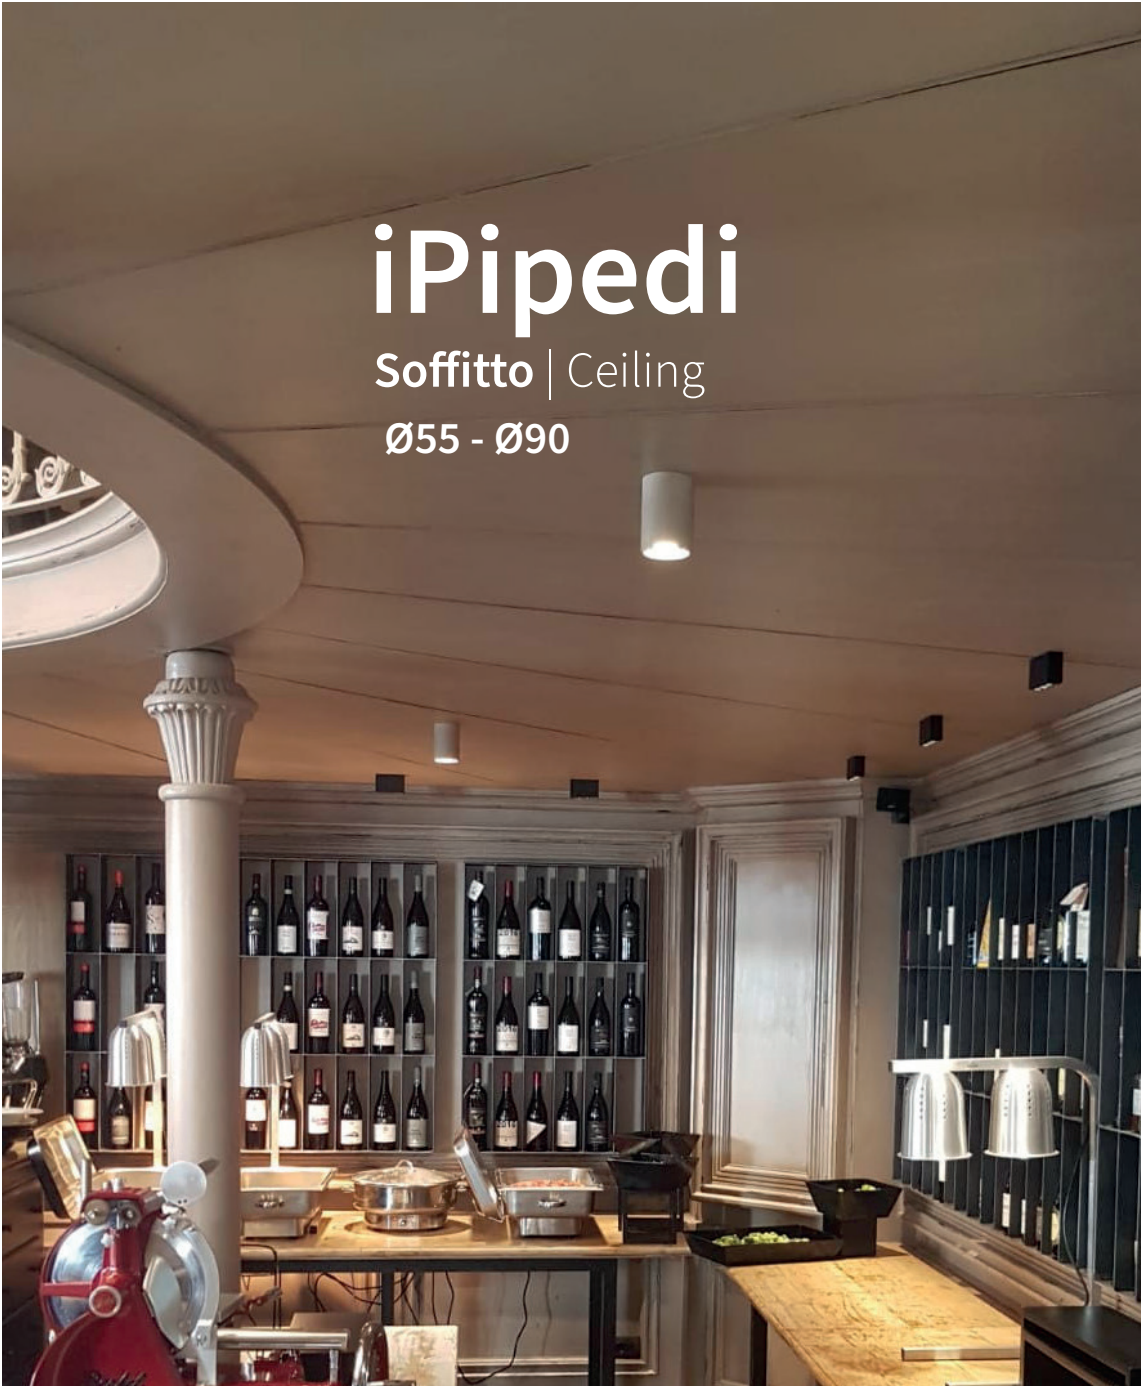

iPipedi

Soffitto | Ceiling

Ø55 - Ø90



/01



/02



/60




/99

● **KELVIN**
27 2700K
30 3000K
35 3500K
40 4000K

● **FASCIO/BEAM**
F Flood
W Wide

Per i gradi vedere in tabella -
For degree check the table



DIMMABLE (OPTIONAL)
● **D** Dali
■ **DF** Dimm taglio di fase |
dimm trailing /leading



/ ## **FINITURA**/FINISHING (PREMIUM AVAILABLE)
/01 bianco/white
/02 nero/black
/60 corten / corten
/99 grafite/graphite

Ø55


I-PIPEDI R55 H300



LED						Im product/beam 3000K		      	
W	ø	H	Kg	F27°	W46°	CODE			
8	55	300	1,07	860	860	PP161.9    /##			
LED						Im product/beam 3000K		      	
W	ø	H	Kg	F27°	W46°	CODE			
12	55	300	1,07	1285	1289	PP013.9    /##			
18	55	300	1,07	1575	1579	PP014.9    /##			
GU10 LED 230V						     			
W	ø	H	Kg	CODE					
1x max 50	55	300	1,04	PP013 /##					


Ø90

I-PIPEDI R90 H90



																			
LED					Im product/beam 3000K														
W	ø	H	Kg		F24°	W38°				CODE									
12	90	90	1,0		1289	-				PP165.9				/##					
17	90	90	1,4		1827	1905				PP166.9				/##					
24,3	90	90	1,4		2356	2430				PP167.9				/##					

I-PIPEDI R90 H300



LED			Im product/beam 3000K		      	
W	Ø	H	F24°	W38°	CODE	
17	90	300	1827	1905	PP021.9    /##	
24,3	90	300	2356	2430	PP022.9    /##	
GU10 LED 230V					      	
W	Ø	H	CODE			
1x max 50	90	300	PP023 /##			
Accessori - accessories: L085#.A: Anello ø85 - Lens with ring ø85						




iPipedi


Parete | wall
Ø90

PARETE MONO EMISSIONE | SINGLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.

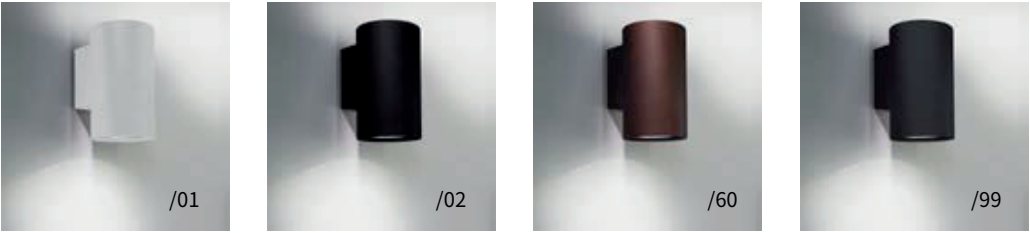

I-PIPEDI R90A H204




LED	W	Ø	H	lm product/beam 3000K	F24°	W38°	CODE
17	90	204	1827	1905	PP221.9	●●●/##	


Accessori - Accessories: L085#.A: Anello ø85 + lente - Lens with rings ø85

PARETE BI EMISSIONE | DOUBLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.

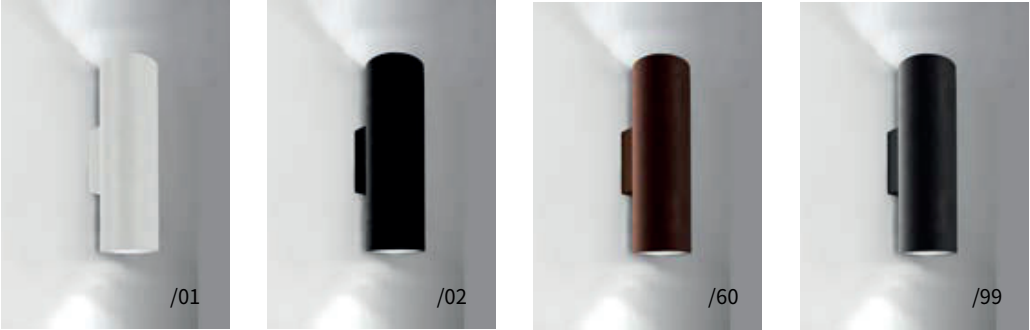

I-PIPEDI R90A2 H350



LED	W	Ø	H	lm product/beam 3000K	F24°	W38°	CODE
2x17	90	350	3654	3810	PP321.9	●●●/##	

Accessori - Accessories: L085#.A: Anello ø85 + lente - Lens with rings ø85

WALL - CEILING
SUSPENSION - FLOOR

● KELVIN

27 2700K

30 3000K

35 3500K

40 4000K

● FASCIO/BEAM

F Flood

W Wide

Per i gradi vedere in tabella - For degree check the table

DIMMABLE (OPTIONAL)

● D Dali

COMPOSIZIONE CODICE: xxx.x ● ● /##

HOW TO CREATE THE CODE: F1000.827S/01

CODE

F1000.8 | ● ● | — /## finishing

base code kelvin beam


/## FINITURA/FINISHING (PREMIUM AVAILABLE)

/01 bianco/white

/02 nero/black

/60 corten /corten

/99 grafite/graphite

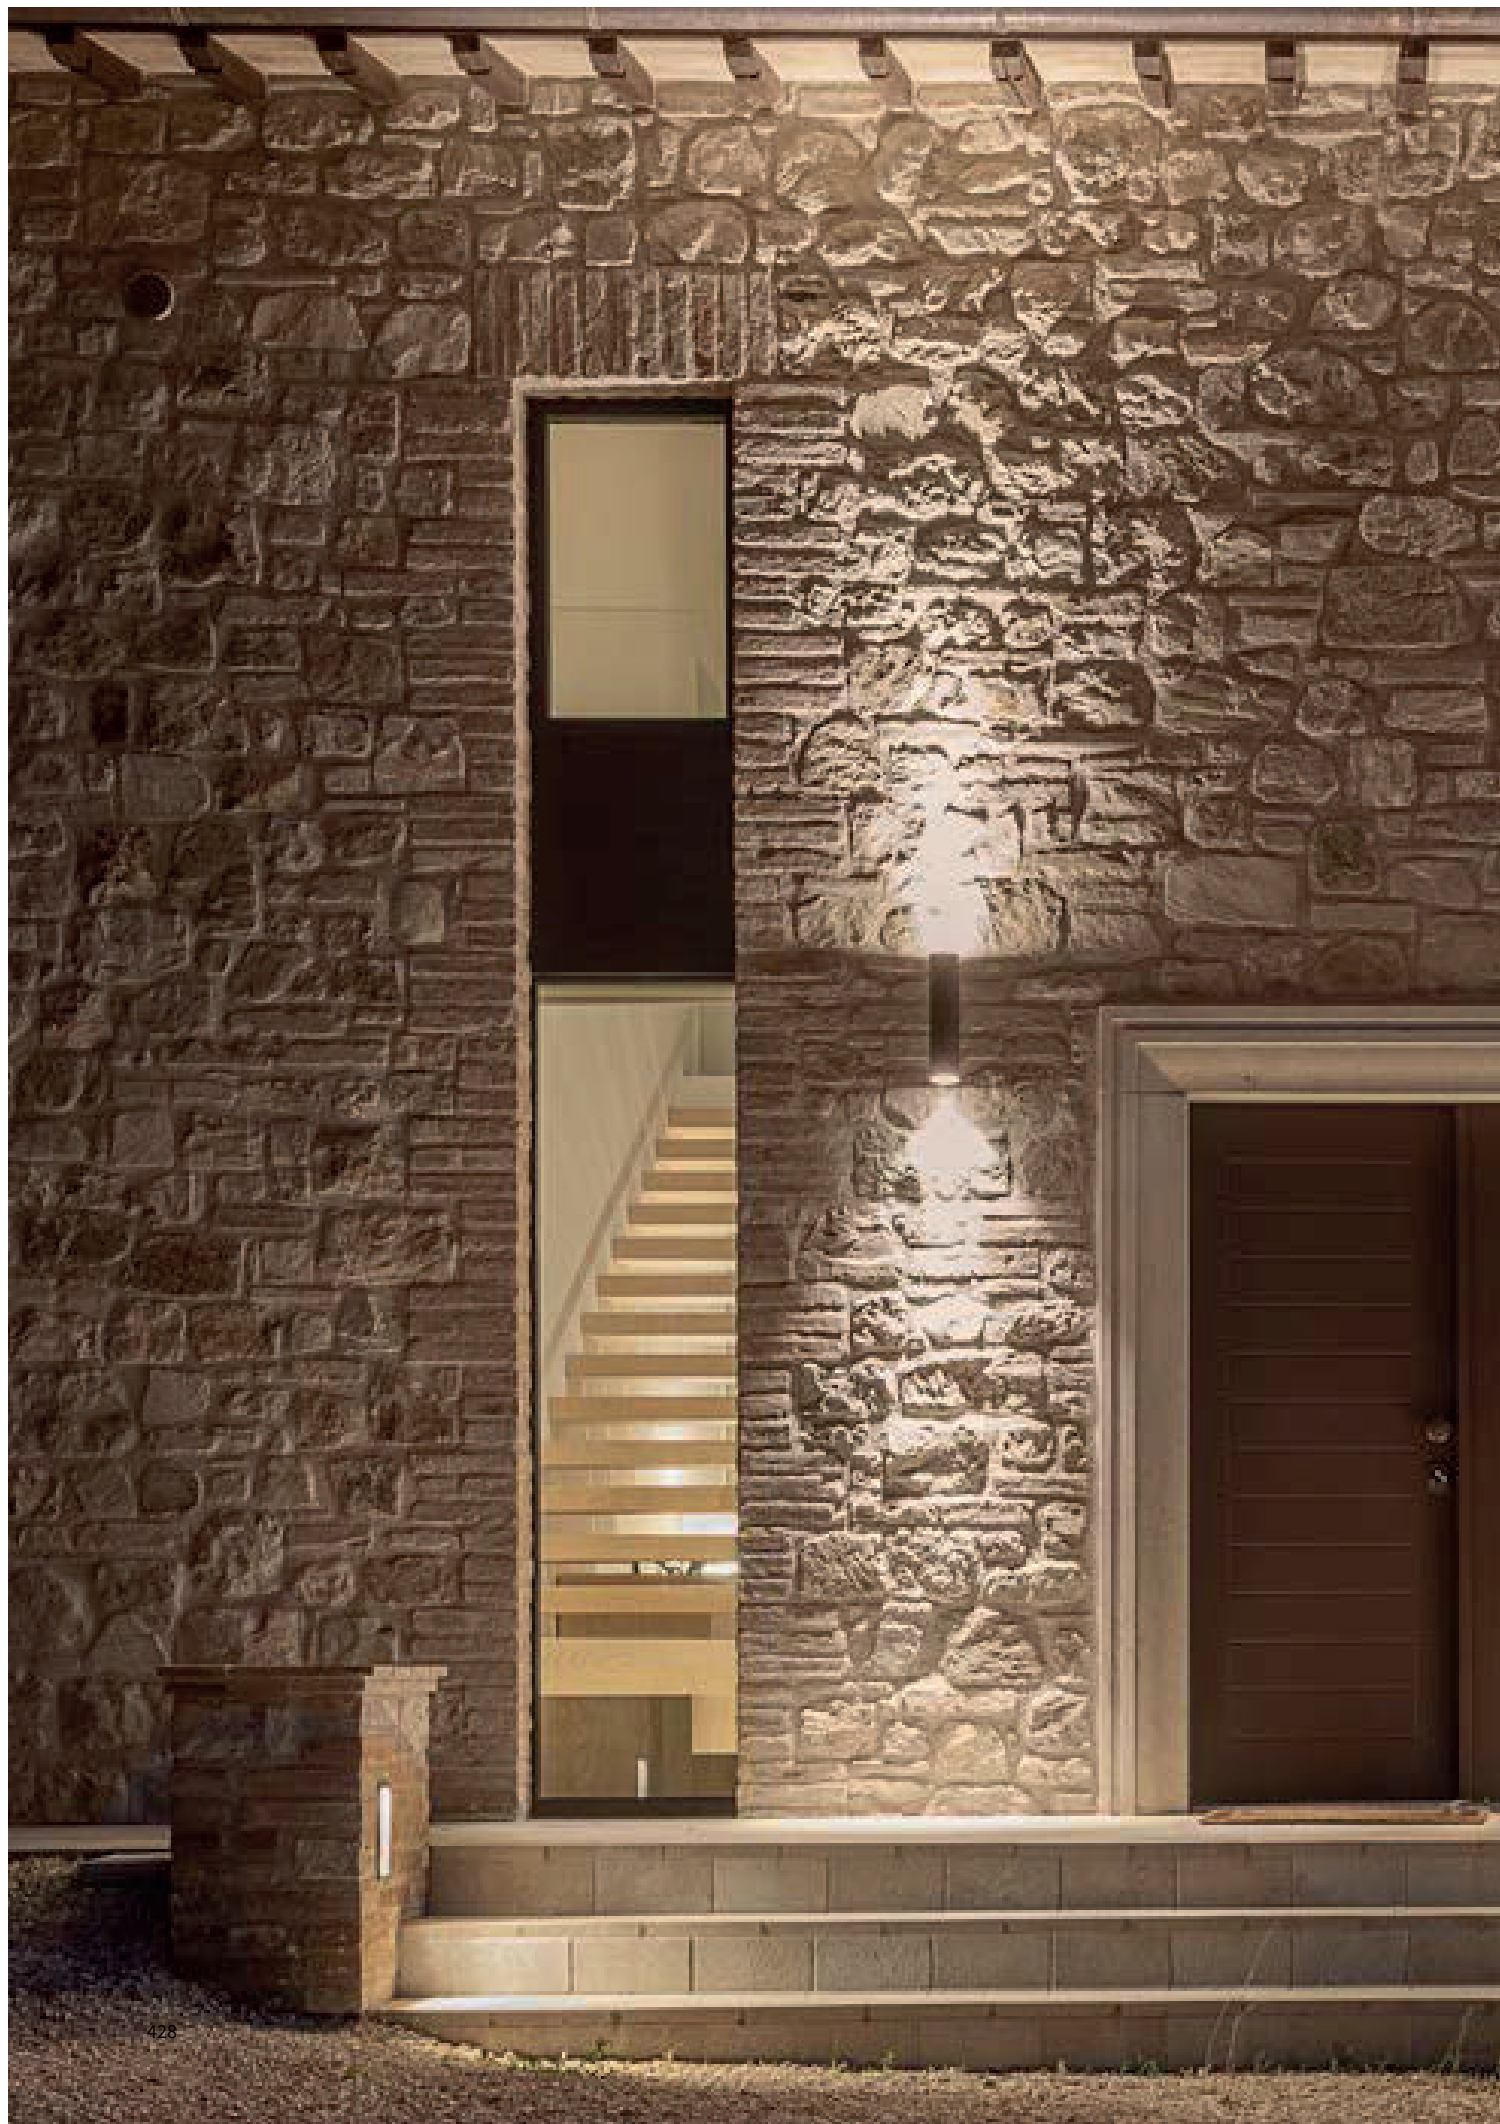


IPIPEDI

IPI PEDI


Collezione di apparecchi per esterni da soffitto, sospensione e parete per illuminazione diretta o diretta/indiretta, completi di sorgenti LED professionali o per lampade LED GU10 230V. Completamente integrati con gruppo di alimentazione. Corpo cilindrico in estruso di alluminio finitura verniciata. Completati di staffa per fissaggio a soffitto, o basetta di fissaggio a parete a seconda dei modelli. Grado di protezione IP54.

Ceiling, suspended or wall luminaires for direct or direct/indirect lighting, complete with professional LED sources or GU10 230V LED bulbs. Integrated power supply unit. Cylindrical body in extruded aluminum with painted finish. Complete with ceiling mounting brackets or wall fixing base according to the models. IP54.

LAMPADA DA SOFFITTO - CEILING LAMP

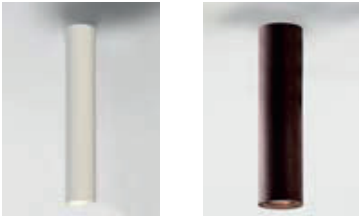

LAMPADA DA PARETE - WALL LAMP



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



VERSIONI CON SORGENTE LED GU10 DISPONIBILI / AVAILABLE GU10 LIGHT SOURCE VERSION

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K


FASCIO/BEAM

F		FLOOD
W		WIDE

FINITURE STANDARD /STANDARD FINISHINGS

/01		BIANCO/WHITE
/02		NERO/BLACK
/60		CORTEN
/99		GRAFITE/GRAPHITE


CURVE FOTOMETRICHE/PHOTOMETRIC DATA

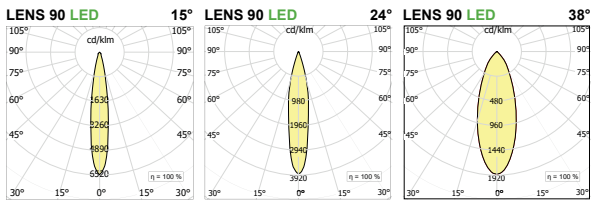

PARETE | WALL GU10



R55A PARETE MONO EMISSIONE | SINGLE EMISSION WALL



GU10 LED 230V

W

C

H

50


1

163

CODE

PP040/##

R55A2 PARETE BI EMISSIONE | DOUBLE EMISSION WALL



GU10 LED 230V

W

5

227

CODE

PP041/##

/ ## FINITURA/FINISHING

COMPOSIZIONE CODICE: XXX.X /##

HOW TO CREATE THE CODE: **F1000/01**

CODE

F1000 /## — finishing

base code

 /01 bianco/white

/02 nero/black

/60 corten

/99 grafite/graphite




IPIPEDI

PARETE | WALL LED

Ø90

I-PIPEDI R90A PARETE MONO EMISSIONE SINGLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



LED	W	Ø	H	lm product/beam 3000K F24°	W38°	CODE
	17	90	204	1827	1905	PP521.9 ●●●/##

I-PIPEDI R90A2 PARETE BI EMISSIONE DOUBLE EMISSION WALL

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



LED	W	Ø	H	lm product/beam 3000K F24°	W38°	CODE
	2x17	90	350	3654	3810	PP621.9 ●●●/##

● KELVIN

27 2700K
30 3000K
35 3500K
40 4000K

● FASCIO/BEAM

F Flood
W Wide

DIMMABLE (OPTIONAL)

● D Dali

/ ## FINITURA/FINISHING

□ /01 bianco/white
■ /02 nero/black
■ /60 corten
■ /99 grafite/graphite

COMPOSIZIONE CODICE: xxx.x ●●●/##
HOW TO CREATE THE CODE: F1000.827SD/01

CODE
F1000.8 ●●●/## — finishing
base code kelvin beam dimmable

OUTDOOR


IPIPEDI

SOFFITTO | CEILING



Ø90 H90

I-PIPEDI R90 H90 SOFFITTO CEILING




						IK10		LED	IP54	CRI >90	A	5	CE
LED	W	Ø	H	Kg	Im product/beam 3000K	F24°	W38°	CODE					
12	90	90	1,0	1289	-	PP165IP.9		●	●	●	/##		
17	90	90	1,4	1827	1905	PP166IP.9		●	●	●	/##		
24,3	90	90	1,4	2356	2430	PP167IP.9		●	●	●	/##		

Ø90 H300

I-PIPEDI R90 SOFFITTO CEILING

Versione base con driver dimmerabile taglio di fase incluso | Trailing/leading edge dimmable included in Led base version.



						IK10		LED	IP54	CRI >90	A	5	CE
LED	W	Ø	H	Im product/beam 3000K	F24°	W38°	CODE						
17	90	300	1827	1905	PP421.9		●	●	●	/##			

				      			
GU10 LED 230V				CODE			
W	Ø	H		PP422 /##			
1x max 50	90	300					

● **KELVIN**

27 2700K

30 3000K

35 3500K

40 4000K

● **FASCIO/BEAM**

F Flood

W Wide

Per i gradi vedere in tabella -
For degrees check the table

DIMMABLE (OPTIONAL)

● **D** Dali

/## FINITURA/FINISHING

/01 bianco/white

/02 nero/black

/60 Corten

/99 grafite/graphite

COMPOSIZIONE CODICE: xxx.x ●●●/##

HOW TO CREATE THE CODE: F1000.827SD/01

CODE

F1000.8

●

●

●

/##

finishing

base code

kelvin

beam

dimmable