


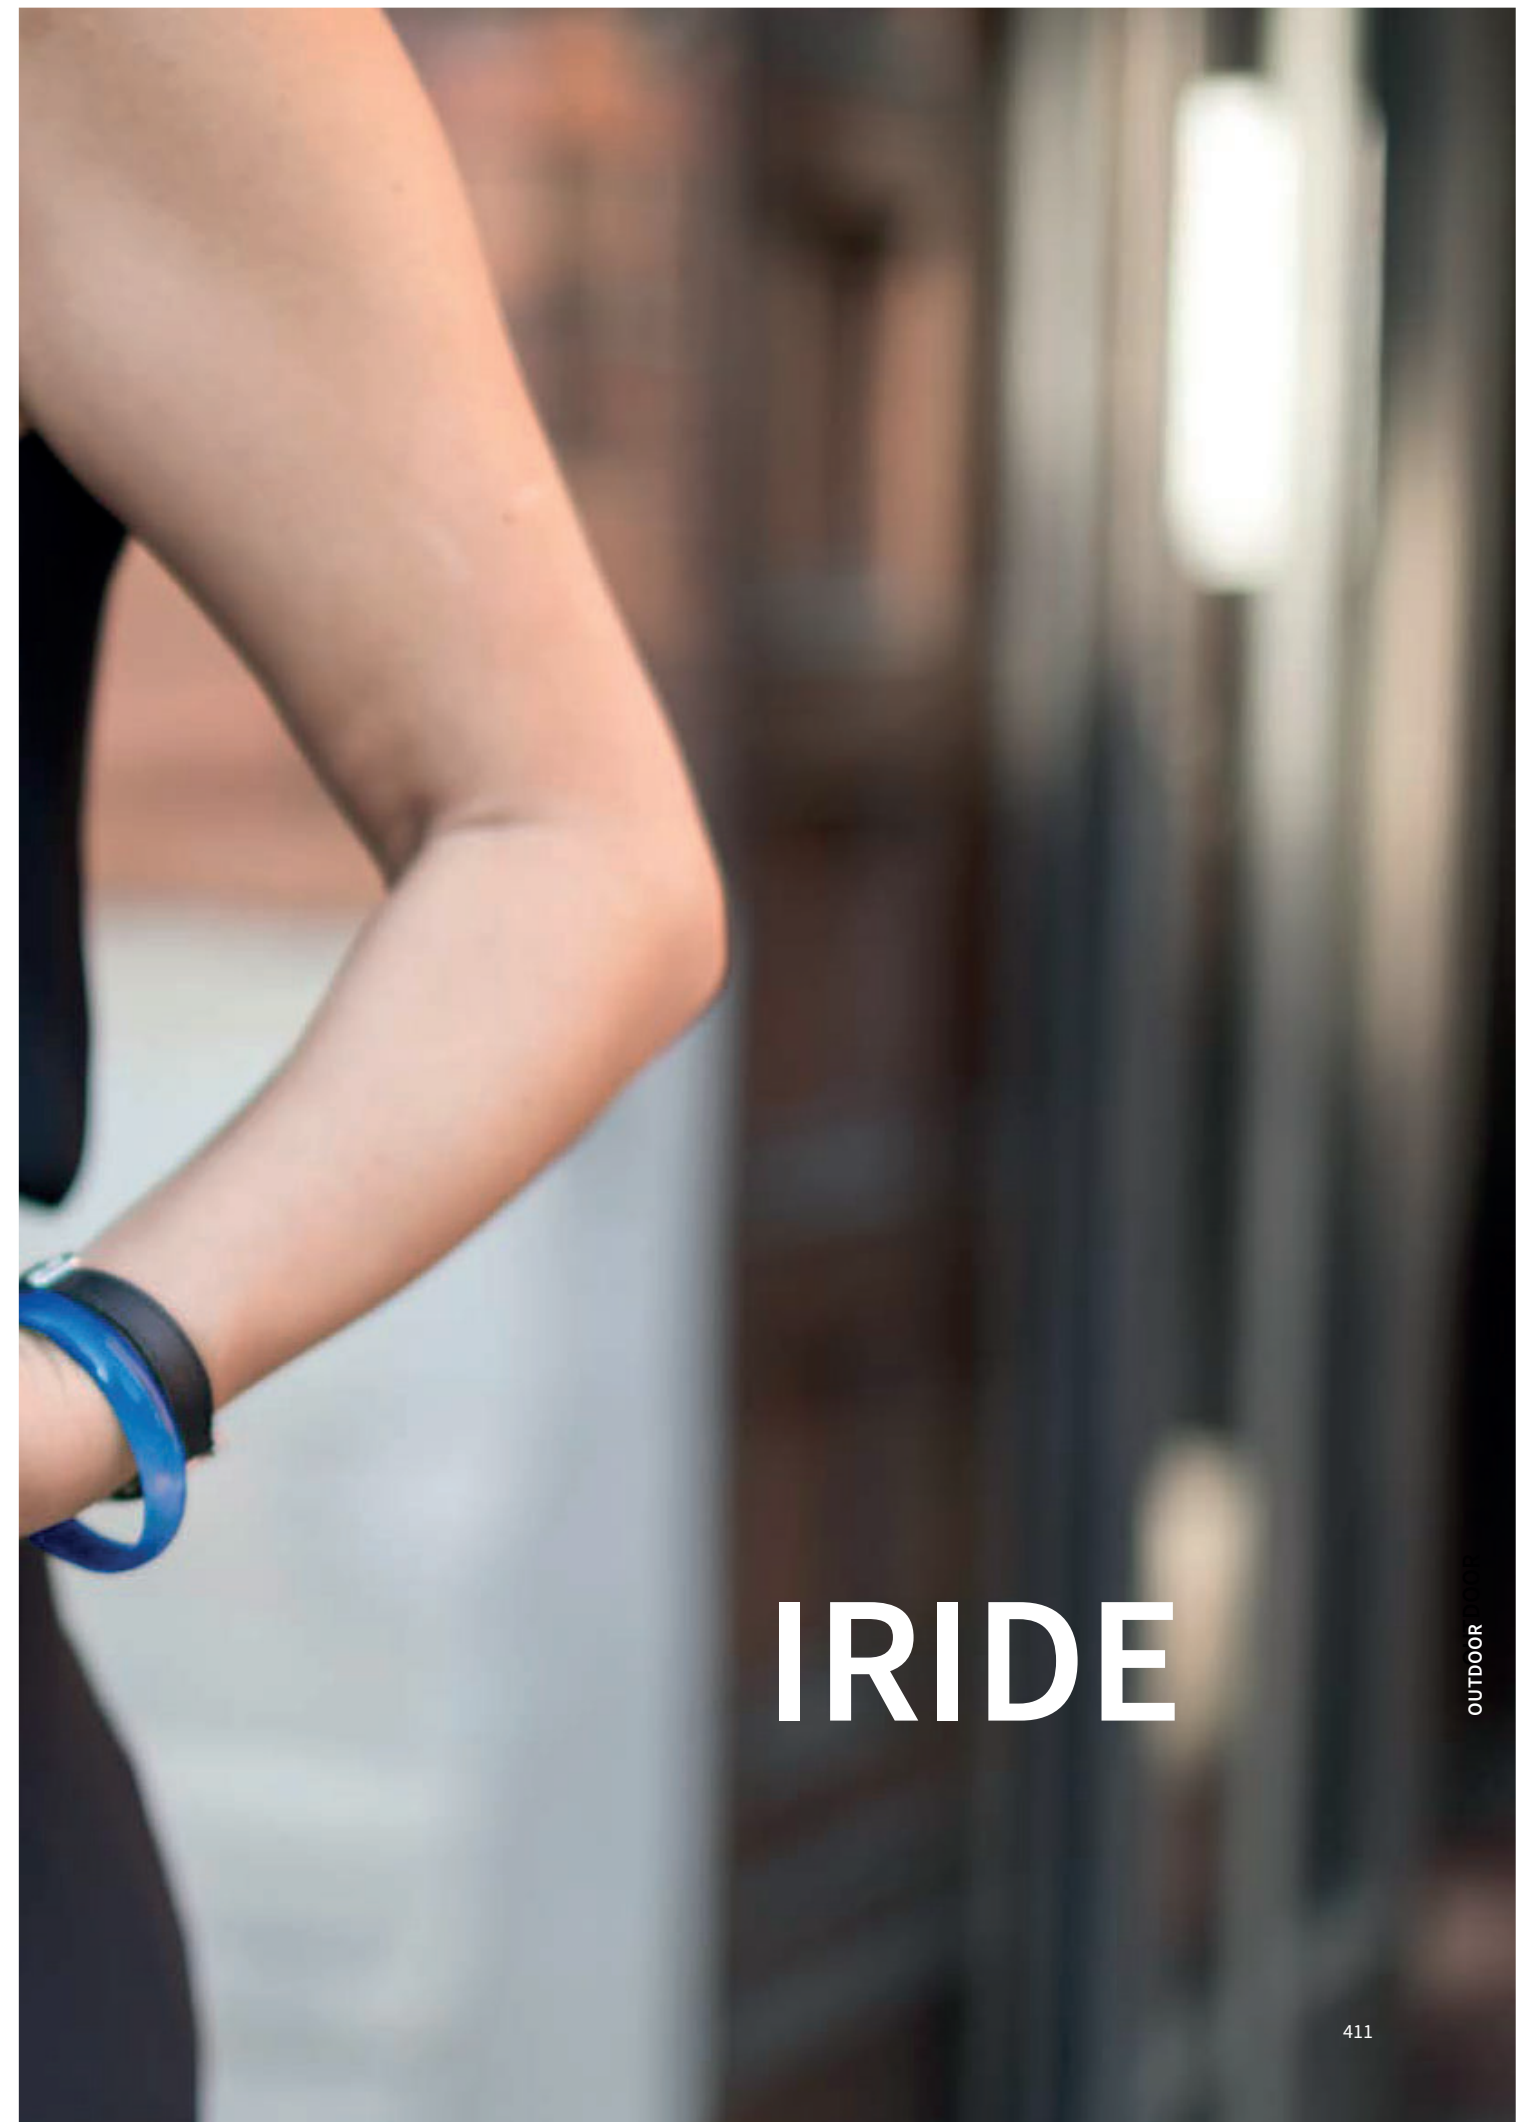

IRIDE

OUTDOOR

IRIDE

Collezione di proiettori orientabili firmati Mario Cucinella. Con sorgenti LED integrate. Possibilità di montaggio a soffitto o su binari elettrificati, misto trifase o in bassa tensione 48V. Iride è costituita da un corpo in pressofusione di alluminio verniciato e da un anello intercambiabile in bianco, nero o cromo, presente in svariate tipologie e forme create per direzionare il fascio di luce in modi differenti. Gruppi ottici completi di led ad alta resa cromatica (CRI>90), lente, housing antiabbagliamento e driver elettronico. Corpo ottico orientabile nelle versione binario, con possibilità di orientamento 0-90° rispetto all’asse orizzontale e 355° rispetto all’asse verticale, la versione a basetta offre un’ulteriore possibilità di rotazione. Ottiche spot, flood e wide. Grado di protezione IP66.

New collection of adjustable projectors by Mario Cucinella featuring integrated LED sources, ceiling or track mounted (Stucchi tracks) both for mains voltage or 48V. Iride consists of a body in painted die-cast aluminum and an interchangeable ring – in white, black or chrome finishing – for customization. Optical groups complete with high color rendering LEDs (CRI> 90), lens, anti-glare housing and electronic driver. Adjustable optical body in the track version, with the 0-90 ° orientation on the horizontal axis and 355 ° on the vertical axis; the surface mounted version offers an additional rotation possibility. Spot, flood and wide optics. IP66.

BASE OUTDOOR



UK CONFORMITY ASSESSMENT E EUROPEAN CERTIFICATION / UK CONFORMITY ASSESSMENT AND EUROPEAN CERTIFICATION



PRODOTTI COSTRUITI CON MATERIALE RICICLABILE / PRODUCTS MADE OF RECYCLABLE MATERIAL



GARANZIA DI 5 ANNI / 5-YEAR WARRANTY



ORIENTABILE / ADJUSTABLE



DIAM.43 MM / 86 MM / 114 MM



IDONEI PER CARTONGESSO OR LATERIZIO / CALCESTRUZZO a seconda dei modelli e degli accessori. SUITABLE FOR PLASTERBOARD OR BRICKWALL / CONCRETE it depends on the model and its accessories.

KELVIN

27		2700°K
30		3000°K
35		3500°K
40		4000°K

FASCIO/BEAM

S		SPOT
F		FLOOD
W		WIDE


FINITURE STANDARD /STANDARD FINISHINGS



/ ## FINITURA/FINISHING

- /01 corpo bianco anello bianco | white body and ring
- /02 corpo nero anello nero | black body and ring
- /21 corpo bianco, anello cromo | white body , chrome ring
- /25 corpo nero, anello cromo | black body, chrome ring
- /28 corpo bianco, anello nero | white body , black ring

CURVE FOTOMETRICHE/PHOTOMETRIC DATA

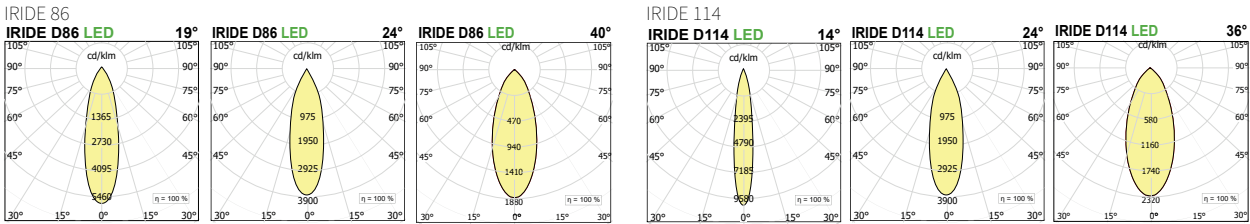


OUTDOOR

IRIDE OUTDOOR
VERSIONE SPECIALE SU PALO | SPECIAL VERSION ON POLE



IRIDE BASETTA | BASE


IRIDE BASE 86S



IK07LEDIP65CRI>90AA5UKCE

LED W	Ø	lm product/beam 3000K			CODE
		S19°	F24°	W40°	
18	86	1772	1832	1586	IR00IP.9●●●/##
26	86	2193	2252	2008	IR01IP.9●●●/##


IRIDE BASE 114S



IK07LEDIP65CRI>90AA5UKCE

LED W	Ø	lm product/beam 3000K			CODE
		S14°	F24°	W36°	
26	114	2118	2531	2108	IR02IP.9●●●/##
34	114	2476	2942	2596	IR03IP.9●●●/##


IRIDE BASE 86L



IK07LEDIP65CRI>90AA5UKCE

LED W	Ø	lm product/beam 3000K			CODE
		S19°	F24°	W40°	
18	86	1772	1832	1586	IR04IP.9●●●/##
26	86	2193	2252	2008	IR05IP.9●●●/##

IRIDE BASE 114L



IK07LEDIP65CRI>90AA5UKCE

LED W	Ø	lm product/beam 3000K			CODE
		S14°	F24°	W36°	
26	114	2118	2531	2108	IR06IP.9●●●/##
34	114	2476	2942	2596	IR07IP.9●●●/##

VERSIONI DISPONIBILI/AVAILABLE VERSION

- KELVIN
- 27 2700K
- 30 3000K
- 35 3500K
- 40 4000K
- TW Tunable White Dali

Note: Gli apparecchi con temperatura di colore variabile (Tunable White) vengono forniti comprensivi di alimentatore DALI | The devices with variable color temperature (Tunable White) are supplied with integrated DALI power supply.

- FASCIO/BEAM
- S Spot
- F Flood
- W Wide

Per i gradi vedere in tabella -
For degrees check the table

- DIMMABLE (OPTIONAL)
- D Dali

COMPOSIZIONE CODICE: xxx.x●●●/##

HOW TO CREATE THE CODE: F1000.827SD/01

CODE

F1000.8

base code

kelvin

beam

dimmable

/## finishing

/## FINITURA/FINISHING

