

Silicone lighting module Nanofile system

code NN05.830




PRODUCT DESCRIPTION

curvature radius 60 mm

PRODUCT SPECS

Installation method	Trimless recessed, system
Light source	Linea Led
Absorbed power	48 W
Color temperature	3000K
Color rendering index CRI	>80
Luminous flux of the product	4900 lm
Luminous efficiency	102 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	L5000 mm
IP Grade	IP67
Power supply/Transformer	Not included
Protocol	See power supply

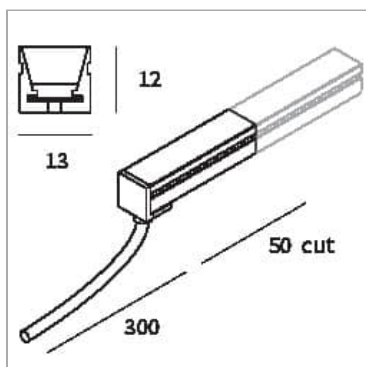

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 2

